



RESIDENTIAL PRODUCT CATALOG



SOLID. STATE.

When it comes to building durability into a product, nobody does it like State. In fact, we've tested our water heaters in some of the most hostile environments and under the toughest conditions to make sure they last longer and provide many more years of hot water.

StateWaterHeaters.com



Table of Contents

About State Water Heaters	2
State Complete Product Offering.....	3
Introducing the ProLine® Family.....	4
Residential Water Heater Selection Guide	5
ProLine® Family Features	6
Contractor Rewards.....	7
RESIDENTIAL GAS	
Product Comparison Guide.....	8
Premier® High Efficiency Power Vent	9
Premier® High Efficiency Power Direct Vent.....	10
Polaris™ High Efficiency.....	11
ProLine® XE Power Vent.....	12
ProLine® XE Non-Condensing Power Direct Vent.....	13
ProLine® XE Non-Condensing Flue Damper	14
ProLine® XE Non-Condensing Ultra-Low NOx Flue Damper	15
ProLine® XE Ultra-Low NOx Power Vent.....	16
ProLine® Master Atmospheric Vent.....	17
ProLine® Master Ultra-Low NOx.....	18
ProLine® High Capacity Atmospheric Vent.....	19
ProLine® Direct Vent.....	20
ProLine® Atmospheric Vent.....	21
ProLine® Mobile Home Atmospheric Vent.....	22
ProLine® Mobile Home Direct Vent.....	23
ProLine® Ultra-Low NOx.....	24
ProLine® Ultra-Low NOx Direct Vent.....	25
ProLine® Ultra-Low NOx High Capacity.....	26
RESIDENTIAL HYBRID ELECTRIC	
Product Comparison Guide.....	27
Premier® AL Smart Hybrid Electric Heat Pump	28
ProLine® XE Hybrid Electric Heat Pump-10-Year Warranty	29
ProLine® XE Hybrid Electric Heat Pump-6-Year Warranty	30
RESIDENTIAL ELECTRIC	
ProLine® Master Smart Electric.....	31
ProLine® Master Electric Grid-Capable	32
ProLine® Master	33
ProLine® Grid-Capable Electric	34
ProLine® Standard	35
Mobile Home.....	36
ProLine® Specialty.....	37
RESIDENTIAL GAS TANKLESS	
Product Comparison Guide.....	38
ProLine XE Tankless Condensing with X3 Scale Prevention Technology	39
ProLine® XE Combi Boiler	40
ProLine® XE Condensing With Recirculation Pump.....	41
ProLine® XE Condensing High Efficiency.....	42-43
ProLine® XE Non-Condensing Concentric Vent	44
ProLine® XE Non-Condensing Ultra-Low NOx.....	45
RESIDENTIAL ELECTRIC TANKLESS	
Electric Tankless	46
RESIDENTIAL PUMP AND EXPANSION TANKS	
Pump Mate™ SPMD Series.....	47
Pump Mate™ SSB Series	48
Heavy-Duty State ProLine® Glasslined & Galvanized.....	49
Waterguard™ & Therm-o-Flex™	50-51

About State Water Heaters

State Water Heaters, a brand of State Industries, LLC., is a leading manufacturer of commercial and residential water heaters. State offers a wide selection of water heater products, and has consistently developed new technologies to ensure longer product life. Based in Ashland City, Tennessee, State has seven water heater manufacturing plants and hundreds of distribution centers across the United States to ensure efficient service to State's national customer base of residential homeowners, wholesalers, contractors, and other members of the engineering community. All State products are backed by solid customer technical support and a durable tank and parts warranty.

History

In 1946, State Water Heaters was founded by Herbert Lindahl, Sr. as a small entrepreneurial company producing coal and wood-burning stoves in a garage in Nashville, Tennessee. In the years that followed, State expanded and became a leader in the water heating industry through steadfast commitments to seeking new materials, new technology and innovative engineering techniques. Landmark moments in State's proud history include:

- 1948** — State produces its first electric water heater.
- 1954** — State expands product lines and manufactures first gas-fired water heaters.
- 1956** — State manufactures its first welded-steel galvanized tanks.
- 1957** — State produces its first porcelain glass-lined tanks; the basic design feature is still in use today.
- 1979** — State is granted US patents for their Sandblaster® commercial water heater design.
- 1996** — State is the world's largest water heater manufacturer with over 2900 employees and average daily production of over 10,000 units. The company introduces a complete new product line that includes the high efficiency models.



State Complete Product Offering

With more than 500 water heater products, State offers customized solutions for all residential and commercial hot water and storage needs. The main categories below outline State's product offerings; for more detailed information, visit statewaterheaters.com

ProLine® Master Gas and Electric –

water heaters offer high-end components, including dual stainless steel elements and increased anode protection, along with extended eight-year warranty coverage in both electric and gas models

ProLine® XE – Premier Power Vent and other high efficiency gas models promise superior performance and up to 96% thermal efficiency

ProLine® XE Premier Heat Pump – water heaters offer four highly efficient operating modes that can help homeowners save on energy bills, cutting operating costs by more than half

Tankless – water heaters are available in indoor and outdoor models to provide space savings and endless hot water

Pump Tanks – State offers five pump tank models, designed to properly collect, store, and dose wastewater.

Expansion Tanks – Waterguard™ and Thermo-Flex™ products eliminate damage to water heater connections and provide added system protection.



Visit StateWaterHeaters.com for complete information.

CODES AND STANDARDS



CSA® - Low Lead Content. This mark shown on a plumbing product signifies certification to California's legislative AB 1953 and Vermont's legislative Act 193 that limits the lead content in plumbing fixtures that come in contact with drinking water to a maximum of 0.25% lead.



Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low NOx emission requirements of less than 40 ng/l.



All State residential water heaters are UL listed according to safety specifications outlined in Underwriters Laboratories, Inc. Standards for Safety (UL 174).



ProLine®

COMMERCIAL GRADE

Introducing the ProLine® Family of Commercial-Grade Residential Water Heaters



ProLine® XE
Premier®

ProLine® Master

ProLine®

When it comes to building a tough commercial-grade water heater, the keys to success are outstanding components and superior manufacturing capabilities. We've combined these two important elements to create the ProLine® family of commercial-grade residential water heaters. This wholesale-channel exclusive will give State Water Heaters' contractors the ultimate advantage.


RESIDENTIAL WATER HEATER SELECTION GUIDE

RESIDENTIAL TANK-TYPE WATER HEATER MODELS

Determine whether your family is low demand or high demand. You should consider your family to be high demand if...

- More than 2 full baths in home
- Teenagers living in home
- Over-sized whirlpool bath or large tub

Locate your family size and determine the first hour rating requirement for your family. If you decide your family is high demand, consider moving up to the next first hour rating level.

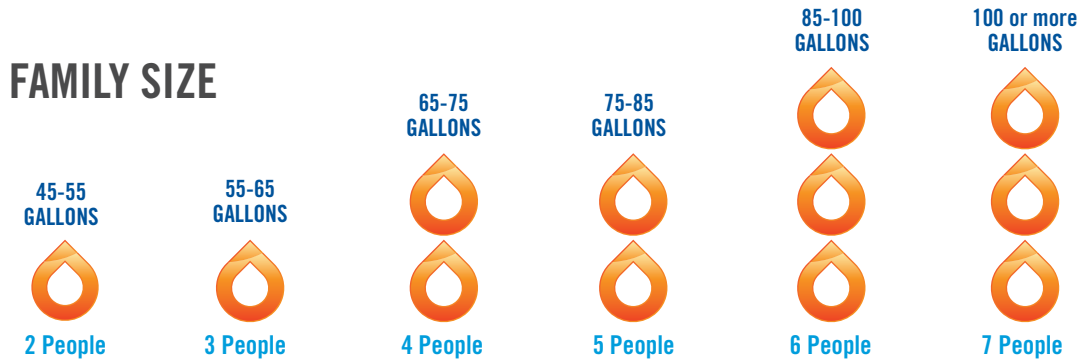

Consult the heater options on the following pages for a State residential water heater with a first hour rating that meets your requirements.

TANKLESS WATER HEATER MODELS


Ground Water Temperature Factor

The temperature of incoming ground water (cold water inlet temperature) varies greatly throughout the U. S. and also fluctuates with the changing of the seasons. The temperature of the water as it enters the water heater will determine the amount of “temperature rise” required to achieve the desired hot water outlet temperature (120°F is recommended).

The best way to measure your incoming ground water temperature is to use a thermometer to measure cold water temperature during the coldest season of the year. To simplify the process, use this map to determine whether your installation location is in the Southern Zone, Central Zone, or Northern Zone.

Peak Hot Water Demand

The next step is to determine how much hot water will be required during the busiest usage period (“peak demand”). Consider all appliances and fixtures that use hot water, including lavatory faucets, kitchen faucets, washing machines, dishwashers, showers and bathtubs. Be sure to determine how many appliances and fixtures will be used at the same time (“peak demand”).

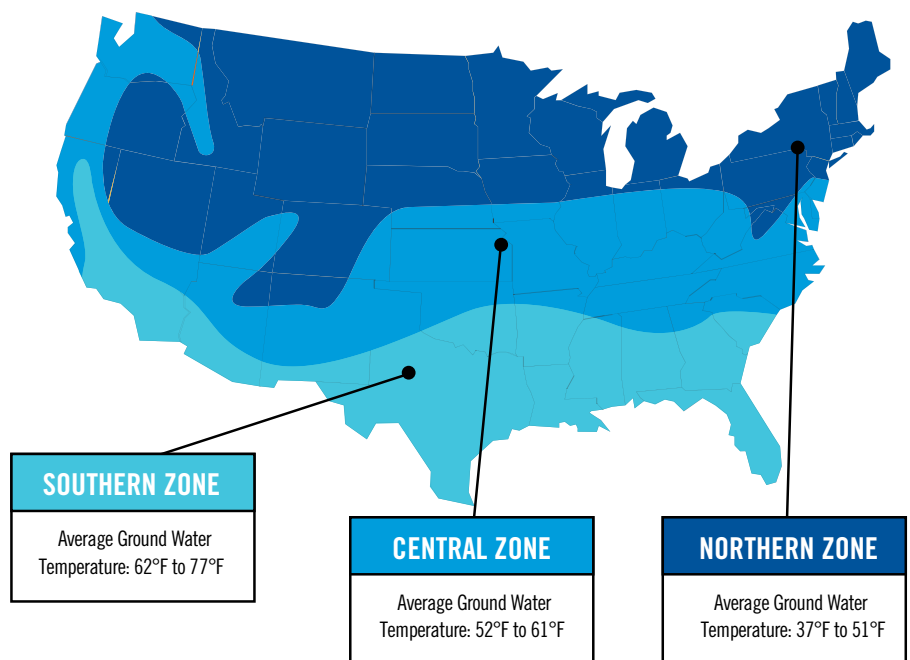

TOUGHER COMPONENTS. LONGER PERFORMANCE.



Blue Diamond® Glass Coating



Stainless Steel Core Anode Rods



DynaClean™ Automatic Sediment Cleaning System



Longer-Lasting Stainless Steel Elements

THERE'S NOTHING STANDARD ABOUT OUR COMMERCIAL GRADE PROLINE®.

Learn more at statewaterheaters.com



Blue Diamond® Glass Coating
State residential gas and electric water heaters have the toughest protection against corrosion to maximize tank life.

State's Blue Diamond® Glass Coating provides superior corrosion resistance compared to the industry-standard glass lining.



ENERGY STAR®
State Water Heaters offers a variety of models that are ENERGY STAR® qualified. Learn more at www.energystar.gov.



Enhanced-Flow Brass Drain Valve
Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type drain valve.

- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a 1/4 turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.



Heat Trap Nipples
Factory-installed for faster installation on most State residential models.



Green Choice® Gas Burner
Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J.



LOW LEAD CONTENT
CSA low lead logo on a plumbing product signifies certification to California's AB1953 and Vermont's legislation Act 193 that limits the lead content in plumbing fixtures that come in contact with drinking water to a maximum of 0.25% lead.




Self-Cleaning Systems on State Residential Models
Automatic self-cleaning action greatly reduces lime and sediment buildup, maximizes hot water output. Made from long-lasting Pex cross-linked polymer.

Our ProLine® XE models come standard with maximum sediment-fighting power and utilize our top-of-the-line Turbo Coil design.



CoreGard™ Anode Rod
Our anode rods have a stainless steel core that extends the life of the anode rod, allowing superior tank protection far longer than standard anode rods.

WHY PROFESSIONALS CHOOSE STATE

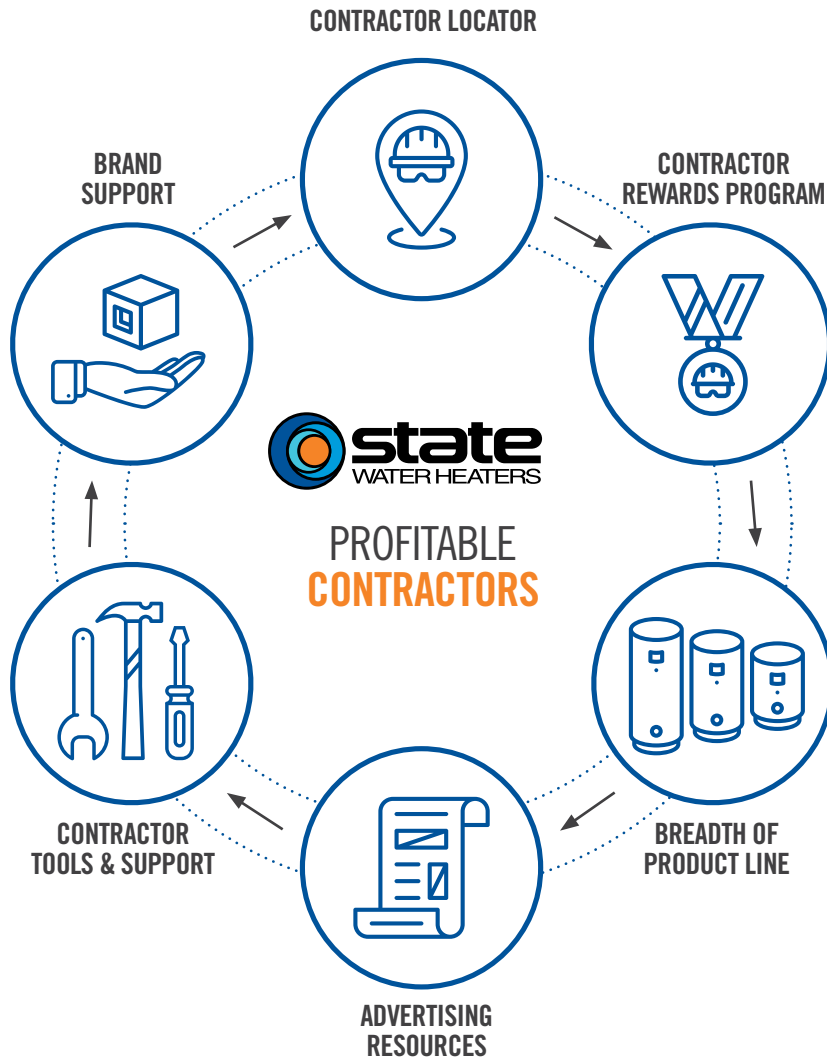

STATE PROVIDES 6 KEY THINGS TO HELP GROW YOUR BUSINESS AND BECOME MORE PROFITABLE.

1. CONTRACTOR LOCATOR

An online locator that drives thousands of consumers from our websites right to our loyal contractors.

2. CONTRACTOR ADVERTISING TOOLS

Our Advertising Resource Center allows contractors to develop an easy, affordable and custom advertising campaign to promote their business. statewaterheater.com/ads

3. BREADTH OF PRODUCT LINE

Residential or commercial, we have the most complete line from standard models to the most innovative high efficiency water heaters available.

4. PRODUCT SALES TOOLS

We provide contractors access to the sales tools needed to close more sales.

5. CONTRACTOR REWARDS™ PROGRAM

Our program rewards our loyal contractors for buying our products. Buy more and get rewarded with prizes and higher status on our contractor locator.

6. BRAND SUPPORT

Marketing investment in our brand drives consumers to recognize our name, visit our website, locate local contractors and request our products.

*To be listed on the Contractor Locator you must meet the minimum threshold of codes entered at: ContractorRewards.com

To learn more about these 6 key things please visit www.statewaterheaters.com/contractor

EARN POINTS BY PURCHASING STATE WATER HEATERS

IT'S FREE AND EASY TO PARTICIPATE
ENROLL ONLINE AT CONTRACTORREWARDS.COM

Eligible products will have a yellow reward code label worth valuable points. Two ways to enter the codes:

1. Download the Contractor Rewards mobile app and scan the code.
2. Enter the code at contractorrewards.com.

Redeem your points on thousands of reward items.

With over 1,000,000 merchandise items,
your reward choices are endless.

To learn more visit: www.statewaterheaters.com/contractorlocator

RESIDENTIAL GAS WATER HEATERS

PREMIUM FEATURES. COMMERCIAL-GRADE COMPONENTS.

PREMIUM FEATURES:

Gas Water Heaters

ProLine®

ProLine®
Master

ProLine® XE



OPERATING COST

\$\$\$

\$\$

\$

INSTALLATION SPACE REQUIRED

■ to ■■

■■

■■■

WARRANTY (YEARS)

6

8

6-10

Blue Diamond® Glass Lining

•

•

•

DynaClean™ Automatic Sediment-Cleaning System

•

•

•

Electronic Gas Valve

•

•

•

Heat Trap Nipples

•

•

•

Enhanced Flow Brass Drain Valve

•

•

•

CoreGard™ Anode Rod Protection

•

•

•

Advanced Anode Protection

•

•

•

Extended Warranty Kit Available

•

•

•*

ENERGY STAR® Qualified

•

•

•*

Electronic User Interface

•

•

•

High Efficiency Performance

•

•

•

Best-In-Class Material and Technology

•

•

•

Industry-Leading Efficiency

•

•

•

Flexible Venting for more Install Options

•

•

•

*Some Models Not Eligible

Commercial-Grade Components

Benefits that homeowners love

PREMIER® HIGH EFFICIENCY POWER VENT

ENERGY STAR® QUALIFIED

CONDENSING DESIGN

- Helical internal heat exchanger keeps hot combustion gases in the tank longer to extract more heat into the water
- High efficiency operation with 0.88 UEF (94% Thermal Efficiency) which saves money on operating costs compared to a standard efficiency gas water heater

POWER VENT DESIGN FOR INSTALLATION VERSATILITY

- Power vent using PVC, CPVC, ABS or Polypropylene either thru-the-wall or thru-the-roof

SIDE-MOUNTED TAPS FOR RECIRCULATING SYSTEMS

- Hot and cold “side taps” allow Premier Power Vent to be used for combination space/water heating applications

INTELLI-VENT™* GAS CONTROL WITH SILICON NITRIDE HOT SURFACE IGNITOR

- Premium-grade hot surface ignitor eliminates standing pilot
- Electronic circuitry provides superior system diagnostic capabilities plus extremely precise temperature control

BLUE DIAMOND® GLASS COATING WITH TWO HEAVY DUTY ANODE RODS

- Provides superior corrosion resistance compared to the industry-standard glass lining

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J

SELF-CLEANING DIP TUBE

CODE COMPLIANCE

- Meets IBC and ICC National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and Current edition of ASHRAE/IES 90.1

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com

*Intelli-Vent™ is a registered trademark of Emerson Electric Company



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Thermal Efficiency	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Per Hour	Dimensions in Inches			Approx. Shipping Weight (lbs)
								Height to Top of Heater	Height to Top of Blower	Diameter	
GP6 50 YTVIT	50	48	119	0.88	90%	92	76,000	68-3/4	71-1/8	21	210

Available in natural gas only.

Standard model certified for sea level to 5,300 ft. elevation. Specify high altitude when ordering for use in elevations up to 10,100 ft.

Optional Condensate Neutralizer Kit available (part number 100112380).

PREMIER® HIGH EFFICIENCY POWER DIRECT VENT

PROLINE® XE
BEST

ENERGY STAR® QUALIFIED

- All models meet the ENERGY STAR® requirement and may also qualify for local utility and rebate programs

ADVANCED ELECTRONIC CONTROL

- Exclusive State designed touch display control system
- Precise temperature control
- Advanced diagnostics
- Built-in diagnostics and operational information

CONDENSING DESIGN

- Helical internal heat exchanger keeps hot combustion gases in the tank longer to extract more heat into the water
- High efficiency operation with up to 0.88 UEF (96% Thermal Efficiency) which saves money on operating costs compared to a standard efficiency gas water heater

HELICAL INTERNAL HEAT EXCHANGER

- Spiral heat exchanger keeps hot combustion gases in the tank longer to lengthen the heat transfer cycle

POWER DIRECT VENT DESIGN

- Power Direct vent using PVC, CPVC or Polypropylene either thru-the-wall or thru-the-roof
- Optional concentric vent and low profile termination kits are available

ULTRA-LOW NOx

- Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for Ultra-Low NOx emissions requirements of 14 ng/J or 20 PPM

SIDE-MOUNTED TAPS FOR RECIRCULATING SYSTEMS

- Hot and cold “side taps” allow Premier® Power Direct Vent to be used for combination space/water heating applications

CODE COMPLIANCE

- Meets IBC and ICC National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Series 300



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Thermal Efficiency	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Per Hour	Dimensions in Inches		Approx. Shipping Weight (lbs)
								Height to Top of Heater	Diameter	
GP6 50 YTPDT	50	49	100	0.88	96%	129	100,000	66-3/4	22	255
GP6 75 YTPDT	75	74	130	0.86	96%	129	100,000	65-1/4	27-3/4	382

Available in natural gas only.
Water connection is 3/4" on all models.
All models are certified from sea level to 10,100 ft. elevation.
Requires 120 VAC power supply.

POLARIS™ HIGH EFFICIENCY

PROLINE® XE
BEST

ENERGY STAR® QUALIFIED

STAINLESS STEEL CONSTRUCTION

- Tank and helical heat exchanger are constructed from 444 stainless steel for excellent corrosion resistance without the need for an anode

CONDENSING DESIGN

- Helical internal heat exchanger keeps hot combustion gases in the tank longer to extract more heat into the water
- High efficiency operation with up to 0.90 UEF (96% Thermal Efficiency) which saves money on operating costs compared to a standard efficiency gas water heater

ULTRA-LOW NOx

- Meets IBC and ICC National Codes

POWER DIRECT VENT DESIGN

- Direct vent using PVC, CPVC or Polypropylene either thru-the-wall or thru-the-roof

QUIET OPERATION

- Quiet blower and burner minimize noise

OPTIONAL CONCENTRIC VENT KIT

ADVANCED ELECTRONIC CONTROL

- Exclusive State designed touch display control system
- Precise temperature control
- Built-in diagnostics and operational information

CODE COMPLIANCE

- Meets IBC and ICC National Codes
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1

10-YEAR LIMITED TANK AND 10-YEAR LIMITED PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



(GHX 50 199 N)



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Thermal Efficiency	Recovery @ 90° Rise Gallon Per Hour	BTU/h Input Gallon Per Hour	Dimensions in Inches		Approx. Shipping Weight (lbs)
								Height to Top of Heater	Diameter	
GHX 34 100 N	34	33	170	0.90	96%	129	100,000	48-1/2	22	150
GHX 34 130 N	34	N/A	N/A	N/A	96%	165	130,000	48-1/2	22	150
GHX 34 150 N	34	N/A	N/A	N/A	94%	190	150,000	48-1/2	22	150
GHX 50 130 N	50	N/A	N/A	N/A	95%	165	130,000	62-3/8	22	176
GHX 50 150 N	50	N/A	N/A	N/A	95%	190	150,000	63-3/4	22	180
GHX 50 175 N	50	N/A	N/A	N/A	96%	222	175,000	63-3/4	22	180
GHX 50 199 N	50	N/A	N/A	N/A	96%	253	199,000	63-3/4	22	180

Available in Propane (LP) gas. Specify when ordering Propane (LP) gas. Models certified for sea level to 7,700 ft. elevation.

PROLINE® XE POWER VENT

PROLINE® XE
BEST

VERSATILE POWER VENT DESIGN

- All models feature an exclusive 3-position rotatable blower outlet which adds flexibility
- Combined horizontal and vertical vent runs up to 180 equivalent feet with 4" diameter venting (ABS, PVC, CPVC and polypropylene)
- All models are equipped with a protected sensor that detects the presence of flammable vapors and automatically disables the burner to prevent ignition
- Air intake snorkel elevates the inlet location of combustion air to prevent flammable vapors from entering the sealed combustion chamber

HOT-SURFACE IGNITOR

- More robust and reliable than standing pilot, and reduces energy consumption

BUILT-IN HEAT TRAPS ON THE WATER INLET AND OUTLET REDUCE THE AMOUNT OF HEAT LOST THROUGH PIPING

2-INCH-THICK, ENVIRONMENTALLY FRIENDLY FOAM INSULATION REDUCES THE AMOUNT OF HEAT LOSS AND CONTRIBUTES TO OVERALL ENERGY EFFICIENCY

USER-FRIENDLY

- State-of-the-art electronic gas control provides more precise temperature control
- LED control light displays operation status and diagnostics information

ENHANCED-FLOW BRASS DRAIN VALVE

AVAILABLE IN NATURAL GAS AND PROPANE

CODE COMPLIANCE:

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA) as amended

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Series	Nominal Capacity	Rated Storage Volume	UEF	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Gallon Per Hour	First Hour Rating (Gallons)	Dimensions in Inches			Approx. Shipping Weight (lb)
								Height to Top of Blower	Height to Top of Tank	Diameter	
GS6 40 YBVIS	200	40	38	0.67	45	40,000	72	59	49-5/8	22	174
GS6 40 YRVIT	200	40	38	0.70	56	50,000	93	68-1/2	59-1/4	20	176
GS6 50 YBVIS	200	50	49	0.72	45	40,000	93	60-1/8	50-3/4	24	198
GS6 50 YRVIT	200	50	48	0.72	56	50,000	96	68-1/8	58-3/4	22	192
GS6 50 YRVHSL	200	50	50	0.73	69	62,000	119	61-1/8	52	24	212
†GS6 75 YRVHTL	310	75	72	0.69	80	76,000	116	70-5/8	61-1/4	26	277

All models have 3/4" NPT water connections.
Side connections standard on YRVHSL and YRVHTL models.
Side connections available on YRVIT models. Add "L" to the model number (example GS6 40 YRVITL).
All models rated for installation at altitudes up to 10,100 ft.

Natural gas models cited are 200/210. Propane models are series 201/211. When ordering propane gas, change "Y" to "H" in the model number (example GS6 40 HBVIS).

PROLINE® XE NON-CONDENSING POWER DIRECT VENT



POWER DIRECT VENT DESIGN

- Combined horizontal and vertical vent runs up to 180 equivalent feet with 4" diameter venting (ABS, PVC, CPVC and polypropylene)
- Two-pipe sealed combustion system uses outside air, eliminating problems caused by insufficient indoor ventilation

GREEN CHOICE® GAS BURNER

- Patented eco-friendly gas burner design reduces NOx and complies with Low-NOx emission requirements of less than 40 ng/J

HOT-SURFACE IGNITOR

- More robust and reliable than standing pilot, and reduces energy consumption

SELF-CLEANING DIP TUBE

USER-FRIENDLY

- State-of-the-art electronic gas control provides more precise temperature control
- LED control light displays operation status and diagnostics information

ENHANCED-FLOW BRASS DRAIN VALVE

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

CODE COMPLIANCE:

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA) as amended

DESIGN-LISTED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21. Z21.10.1-CSA 4.1 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Series	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	NG Input Per Hour Propane	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches			Approx. Shipping Weight (lb)
								Height to Top of Blower	Height to Top of Tank	Diameter	
GS6 40 YBPDS	200	40	38	74	0.68	40,000	45	58-1/4	49-5/8	22	174
GS6 50 YBPDT	200	50	48	81	0.72	45,000	50	67-1/2	58-3/4	22	192
GS6 50 YRPDTL 5	200	50	48	118	0.73	62,000*	73	69	60-1/4	22	200
†GS6 75 YRPDTL	310	75	72	129	0.68	76,000	82	70-5/8	61-1/2	26	277

When ordering propane (LP), change "Y" to "H" in the model number (example GS6 40 YBPDSL).
 For side connect models, add "L" to the model number (example: GPDX 50L).
 Side connections available on YBPDS and YBPDT models.
 Natural gas models cited are series 200/210. Propane models are series 201/211.

Side connections are standard on YRPDTL models.
 All models rated for installation at altitudes up to 10,100 ft.

PROLINE® XE NON-CONDENSING FLUE DAMPER

PROLINE® XE
BEST

AUTOMATIC FLUE DAMPER

- Increases efficiency as it automatically opens and closes to reduce heat loss in the standby mode

ELECTRONIC GAS CONTROL

DIAGNOSTICS

ELECTRONIC IGNITION

SELF-CLEANING DIP TUBE

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J

COREGARD™ ANODE ROD

ENHANCED-FLOW BRASS DRAIN VALVE

BLUE DIAMOND® GLASS COATING

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1 - CSA 4.1 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Gallon Per Hour Natural*	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches					Approx. Shipping Weight (lbs)
							Foam Thickness	Height to Top of Draft Hood	Height to Top of Tank	Diameter	Draft Hood Outlet	
Tall Models												
GS6 40 YBFT	40	38	70	0.64	40,000	42	2	64-1/4	58-1/4	20	3 or 4	152
GS6 50 YBFT	50	48	84	0.69	40,000	42	2	63-1/2	57-1/4	22	3 or 4	167
Short Models												
GS6 40 YBFT	40	38	65	0.66	40,000	42	2	54	47-3/4	22	3 or 4	149
GS6 50 YBFT	50	49	78	0.69	40,000	42	2	55-3/4	49-1/2	24	3 or 4	175

Requires 120 VAC power supply.

Water connection is 3/4" on all models.

When ordering top-mounted T&P valve, add "G" to the model number (example: GS6 40 YBFT G).

All models are certified from sea level to 10,100 ft. elevation.

* GS6 50 YBFS available in natural gas only. All other models available in propane (LP) gas.

PROLINE® XE NON-CONDENSING ULTRA-LOW NOX FLUE DAMPER



AUTOMATIC FLUE DAMPER

- Automatic flue damper increases efficiency to provide maximum household annual operating cost savings

GREEN CHOICE® GAS BURNER

- Enhanced Ultra-Low NOx burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NOx emissions of less than 10ng/J

ELECTRONIC GAS CONTROL

SELF-CLEANING DIP TUBE

COREGARD™ ANODE ROD

BLUE DIAMOND® GLASS COATING

ENHANCED-FLOW BRASS DRAIN VALVE

REQUIRES 120V POWER 19.5' CORD INCLUDED

CODE COMPLIANCE

- Meets UBC, CEC and HUD (excluding mobile homes) National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended

CSA AND DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1 - CSA 4.1 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Natural Gas	Recovery @ 90F Rise (Gallon/Hour)	Dimensions in Inches					Approx. Shipping Weight
							Foam Thickness	Height to Top of Blower	Height to Top of Tank	Diameter	Draft Hood Outlet	
GS6-40-BFUT	40	38	68	0.65	40,000	42	2	64-1/4	58-1/4	20	3 or 4	152
GS6-50-BFUT	50	48	83	0.70	40,000	42	2	63-1/2	57-1/4	22	3 or 4	167

Requires 120VAC power supply located within 19ft of the heater.
 Water connection is 3/4" on all models.
 Standard top T&P, specify when ordering side T&P.
 All models are certified from sea level to 7,800ft elevation.

PROLINE® XE ULTRA-LOW NOx POWER VENT

PROLINE® XE
BEST

POWER VENTING MADE SIMPLE

- Thru-the-Wall or Thru-the-Roof power venting using either 2" or 3" PVC, ABS or CPVC vent pipe

INTELLI-VENT™ GAS CONTROL

- Advanced electronics for more precise control of water temperature and easy to understand system diagnostics

COMBINATION THERMOSTAT/ECO

- Utilizes an intermittent ignition gas valve (no standing pilot) with thermistor temperature sensor and built-in high temperature cut off

QUIET AND EFFICIENT BLOWER

- Factory-installed 6-foot power cord with 3-prong male connector provided. Electrical requirements; 110/120 VAC power source, less than 5 amp draw

SELF-CLEANING DIP TUBE

- Helps reduce lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer

COREGARD™ ANODE ROD

GREEN CHOICE® GAS BURNER

- Complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NOx emissions of less than 10 ng/J

ENHANCED-FLOW BRASS DRAIN VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Gallon Per Hour	Dimensions in Inches			Approx. Shipping Weight (lbs)
							Height to Top of Blower	Height to Top of Tank	Diameter	
GS6 40 UBVIT	40	38	76	0.70	42.6	42,000	66-7/8	58-5/8	20	170
GS6 50 UBVIT	50	48	71	0.65	42.6	42,000	65-5/8	57-7/16	22	207

No option available for Top T&P valve.

PROLINE® MASTER ATMOSPHERIC VENT

INTELLIGENT CONTROL LOGIC

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source
- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics

Not available on 60,000 BTU input models (GW8 55 RCT)

SELF CLEANING DIP TUBE

COREGARD™ ANODE ROD

- ProLine® Master products have increased anode protection with either longer, or multiple anodes depending on model

PUSH-BUTTON PIEZO IGNITOR

ENHANCED-FLOW BRASS DRAIN VALVE

HEAT TRAP NIPPLES

BLUE DIAMOND® GLASS COATING

- Blue Diamond® Glass Coating blend is formulated in the same lab that creates the protection for our industry-leading commercial product line

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type water heaters

8-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



PROLINE® MASTER
BETTER



Model Number	Nominal Gallon Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Natural Gas	BTU Input Propane Gas	Recovery 90°F Rise Gallon Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)
								Height to Top of Draft Hood	Height to Top of Tank	Diameter	Draft Hood Outlet	
Tall Models												
GW8 40 BCT	40	38	80	0.64	40,000	36,000	42	61-3/4	58-1/4	20	3 or 4	138
GW8 50 BRT	50	48	81	0.62	40,000	37,000	41	60-3/4	57-1/4	21	3 or 4	148
GW8 50 BCT	50	48	84	0.62	40,000	37,000	43	60-3/4	57-1/4	22	3 or 4	165
GW8 50 RCT*	50	48	89	0.61	50,000	45,000	54	60-3/4	57-1/4	22	4	165
GW8 55 XCT*	55	55	83	0.62	60,000	54,000	65	59-3/4	55-1/4	24	4	185
Short Models												
GW8 40 BCS	40	38	67	0.58	40,000	36,000	41	51-1/2	48	22	3 or 4	135
GW8 50 BCS	50	50	81	0.62	40,000	40,000	43	53-1/4	49-3/4	24	3 or 4	177

Water connection - 3/4" on all models.

*Optional side-mounted recirculating taps, add "L" to the suffix in the model number (GS6 50 RCTL).

All models approved for installation from sea level to 10,100 ft. elevation.

PROLINE® MASTER ULTRA-LOW NOx

THE ELECTRONIC GAS CONTROL INCORPORATES AN LED STATUS INDICATOR THAT MONITORS SYSTEM OPERATION AND SERVICE DIAGNOSTICS

HIGH UNIFORM ENERGY FACTORS (UEF)

- Eco-friendly non-CFC foam insulation, heat traps and specially designed combustion chamber combine to produce a high UEF for maximum savings on operating costs

GREEN CHOICE® GAS BURNER

- Enhanced Ultra-low NOx burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NOx emissions of less than 10 ng/J

SELF-CLEANING DIP TUBE

COREGARD™ ANODE ROD

- ProLine® Master products have increased anode protection with either longer, or multiple anodes depending on model

PUSH-BUTTON PIEZO IGNITOR

HEAT TRAP NIPPLES

BLUE DIAMOND® GLASS COATING

- Blue Diamond® Glass Coating blend is formulated in the same lab that creates the protection for our industry-leading commercial product line

ENHANCED-FLOW BRASS DRAIN VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters

8-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Natural Gas	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)	
							Height to Top of Draft Hood	Height to Top of Tank	Diameter	Draft Hood Outlet		
Tall Models												
GW8 40 BRUT	40	38	72	0.55	40,000	41	62	58-1/4	18	3 or 4	125	
GW8 40 BCUT	40	38	81	0.64	40,000	41	62	58-1/4	20	3 or 4	125	
GW8 50 BRUT	50	48	84	0.61	40,000	42	60-3/4	57-1/4	20	3 or 4	148	
GW8 50 BCUT	50	48	84	0.64	40,000	42	60-3/4	57-1/4	22	3 or 4	148	
GW8 50 RCUTL*	50	48	91	0.60	50,000	51	61	57-1/2	22	4	177	
Short Models												
GW8 40 BCUS	40	38	72	0.57	40,000	41	51-1/2	47-3/4	22	3 or 4	138	

All models may be ordered from the factory with top T&P valve as an option by adding "G" to the suffix of the model number (example GW8 40 BCUTG).

*Side loop connections are standard on model GW8 50 RCUTL.

*Most models approved for installation from sea level to 7,700 ft. elevation (except GW8 50 RCUTL, approved to 5,400 ft.).

PROLINE® HIGH CAPACITY ATMOSPHERIC VENT

HIGHEST RECOVERIES

- Capacity/input combinations up to 98 gallons/75,100 BTUs produce recoveries up to 81 gallons per hour

THE ELECTRONIC GAS CONTROL INCORPORATES AN LED STATUS INDICATOR THAT MONITORS SYSTEM OPERATION AND SERVICE DIAGNOSTICS

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions up to 33% and complies with Low-NOx emission requirements of 40 ng/J

SELF-CLEANING DIP TUBE

COREGARD™ ANODE ROD

PUSH-BUTTON PIEZO IGNITOR

BLUE DIAMOND® GLASS COATING

ENHANCED-FLOW BRASS DRAIN VALVE

CODE COMPLIANCE

- Meets UBC, CEC and ICC National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA4.1 standards governing storage tank-type gas water heaters. CSA Certified and ASME Rated T&P Relief Valve

MAXIMUM HYDROSTATIC WORKING PRESSURE 150 PSI

DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21. 10.3 CSA 4.3 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS LIMITED WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	UEF	BTU Input Natural Gas	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)
						Height to Top of Draft Hood	Height to Top of Tank	Diameter	Draft Hood Outlet	
GS6 75 XRRS	74	71	0.60	75,100	81	61	58-1/2	16	4	270
GS6 100 XRRT	98	95	0.58	75,100	81	68-1/2	66-1/2	16	4	340

Water connections are 1" male NPT on GS6 75 XRRS and 1-1/4" on GS6 100 XRRT.
 For 10-year tank and 10-year parts limited warranty, change "6" to "X" in the model number (example: GSX 75 XRRS).
 For optional side-mounted recirculating taps, add "L" to suffix (example: GS6 75 XRRS L).
 When ordering propane (LP) gas change "X" to "C" in the model number (example: GS6 75 CRRS).
 All models are certified from sea level to 7,700 ft. elevation.

PROLINE® DIRECT VENT

DIRECT VENT DESIGN

- One-pipe, dual-channel closed system draws all make-up air from outside the home, eliminating problems caused by insufficient indoor ventilation and is FVIR compliant
- Horizontal air intake and venting on all models up to 80 inches from outside wall with no electrical power needed

INTELLIGENT CONTROL LOGIC

GREEN CHOICE® GAS BURNER

- Patented eco-friendly gas burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J

SELF-CLEANING DIP TUBE

COREGARD™ ANODE ROD

PUSH BUTTON PIEZO IGNITOR

HEAT TRAP NIPPLES

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure. Listed according to ANZI Z21. 10.1-CSA 4.1 standards governing storage tank-type gas water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Input BTU Per Hour	Recovery 90°F Rise Gallon Per Hour	Dimensions in Inches			Approx. Shipping Weight (lbs)
							Height to Top of Tank	Diameter	Vent Supplied	
GS6 40 YBDS	40	39	64	0.60	38,000	41	49-3/4	22	Co-Axial	178
GS6 50 YBDS	50	48	77	0.66	40,000	43	59	22	Co-Axial	200
GS6 50 YRDS	50	48	83	0.65	47,000	51	60	22	Co-Axial	215

Dual-channel system has 3" vent pipe inside 6" air intake pipe, for the 40 and 50-gallon models.
 Water connection is 3/4" male on 8" center.
 Allow 29 1/2" for front to back dimension for gas control and air intake pipe at the rear of the heater.
 No option available for top T&P.
 All models are available in propane (LP) gas (series 301).
 All models are certified from sea level to 7,700 ft. elevation.
 All models available with side connections. Add "L" to the model number, example GS6 40 YBDS L.

PROLINE® ATMOSPHERIC VENT

INTELLIGENT CONTROL LOGIC

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source
- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics

*Not available on 60,000 BTU input models GS6 50 XCT and GS6 55 XCT

SELF CLEANING DIP TUBE

COREGARD™ ANODE ROD

PUSH-BUTTON PIEZO IGNITOR

ENHANCED-FLOW BRASS DRAIN VALVE

HEAT TRAP NIPPLES

BLUE DIAMOND® GLASS COATING

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Gallon Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Natural Gas	BTU Input Propane Gas	Recovery 90°F Rise Gallon Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)
								Height to Top of Draft Hood	Height to Top of Tank	Diameter	Draft Hood Outlet	
Tall Models												
†GS6 30 ORBTR	30	29	62	0.60	32,000	29,000	32	60-1/2	57	16	3 or 4	123
GS6 30 OCTR	30	29	62	0.60	32,000	29,000	31	60-1/2	57	18	3 or 4	132
‡GS6 40 OCT	40	38	65	0.59	35,500	N/A	38	61-3/4	58-1/4	20	3 or 4	138
†GS6 40 BRBT	40	38	78	0.65	40,000	36,000	42	61-3/4	58-1/4	18	3 or 4	130
GS6 40 BCT*	40	38	80	0.64	40,000	36,000	42	61-3/4	58-1/4	20	3 or 4	138
GS6 50 BRT*	50	48	81	0.62	40,000	37,000	41	60-3/4	57-1/4	21	3 or 4	148
GS6 50 BCT*	50	48	84	0.62	40,000	37,000	43	60-3/4	57-1/4	22	3 or 4	165
GS6 50 RCT*	50	48	89	0.61	50,000	45,000	54	60-3/4	57-1/4	22	4	165
†GS6 50 XCT*	50	49	99	0.61	60,000	54,000	65	65-1/2	61	22	4	190
GS6 55 XCT*	55	55	83	0.62	60,000	54,000	65	59-3/4	55-1/4	24	4	185
Short Models												
†GS6 30 ORBSR	30	29	65	0.60	32,000	29,000	32	50-1/4	46-3/4	18	3 or 4	114
GS6 30 OCSR	30	29	55	0.60	32,000	29,000	32	50-1/4	46-3/4	20	3 or 4	108
†GS6 40 BRBS	40	38	68	0.57	40,000	36,000	41	51-1/2	48	20	3 or 4	134
GS6 40 BCS	40	38	67	0.58	40,000	36,000	41	51-1/2	48	22	3 or 4	135
GS6 50 BCS	50	50	81	0.62	40,000	40,000	43	53-1/4	49-3/4	24	3 or 4	177

Water connection is 3/4" on all models. † *Optional side-mounted recirculating taps, add "L" to the suffix in the model number (GS6 40 RCTL).

† Models ship with supplied insulation blanket. † For 10-year tank and 10-year parts limited warranty, change "6" to "X" in the model number (example: GSX 40 OCT).

All models approved for installation from sea level to 10,100 ft. elevation. † ‡ LP models not available on GS6 40 OCT.

PROLINE® MOBILE HOME ATMOSPHERIC VENT

COMPLIES WITH HUD STANDARDS FOR MANUFACTURED HOUSING INSTALLATION

GAS CONTROL CONVERTIBLE FOR NATURAL AND PROPANE GAS

- For flexibility to meet the varying needs of manufactured housing installations

SIDE-MOUNTED 3/4" COLD WATER INLET

- For ease of installation when cold water supply originates below the structure
- Top mounted 3/4" hot water outlet

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J

COREGARD™ ANODE ROD

BLUE DIAMOND® GLASS COATING

ENHANCED-FLOW BRASS DRAIN VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA4.1 standards governing storage tank-type gas water heaters

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Per Hour Natural Gas	BTU Input Per Hour Propane Gas	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)
								Height to Top of Draft	Height to Top of Tank	Diameter	Draft Hood Outlet	
GS6 30 MHG	30	29	63	0.61	35,500	32,000	36	61-1/2	58	18	3 or 4	129
GS6 40 MHG	40	38	59	0.58	35,500	32,000	36	61-3/4	58-1/4	20	3 or 4	153

All models ship from the factory for use with natural gas. A complete propane (LP) burner is supplied for converting to propane gas.

All models are certified from sea level to 10,100 ft. elevation.

No option available for top T&P.



PROLINE® MOBILE HOME DIRECT VENT

COMPLIES WITH HUD STANDARDS FOR MANUFACTURED HOUSING INSTALLATION

GAS CONTROL CONVERTIBLE FOR NATURAL AND PROPANE GAS

- For flexibility to meet the varying needs of manufactured housing installations

DIRECT VENT MODELS PACKAGE WITH BOTTOM INTAKE AIR VENT

- To draw all combustion make-up air from outside the structure

OPTIONAL DUCTED AIR INLET KIT FOR DIRECT VENT MODELS

- For use when water heater is installed over a basement
- Provision for horizontal air inlet ducting

SIDE-MOUNTED 3/4" COLD WATER INLET

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions up to 33% and complies with Low-NOx emission requirements of 40 ng/J

SELF-CLEANING DIP TUBE

COREGARD™ ANODE ROD

ENHANCED-FLOW BRASS DRAIN VALVE

BLUE DIAMOND® GLASS COATING

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Btu Input Per Hour Natural Gas	Btu Input Per Hour Propane	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)
								Height to Top of Vent Conntion	Height to Top of Tank	Diameter	Vent Outlet	
GS6 30 MDV	30	29	60	0.61	30,000	29,000	31	61	58	18	3	129
GS6 40 MDV	40	38	57	0.59	32,000	29,000	33	61-3/4	58-3/4	20	3	153
GS6 50 MDV	50	47	67	0.56	40,000	37,000	39	60	57	22	3	168

All models ship from the factory for use with natural gas, a complete propane burner is supplied for converting to propane gas.

No option available for top T&P.

Water connections-3/4" on all models.

All models approved fro installation from sea level to 5,400 ft. elevation.

PROLINE® ULTRA-LOW NOx

THE ELECTRONIC GAS CONTROL INCORPORATES AN LED STATUS INDICATOR THAT MONITORS SYSTEM OPERATION AND SERVICE DIAGNOSTICS

HIGH UNIFORM ENERGY FACTORS (UEF)

- Eco-friendly non-CFC foam insulation, heat traps and specially designed combustion chamber combine to produce a high UEF for maximum savings on operating costs

GREEN CHOICE® GAS BURNER

- Enhanced Ultra-low NOx burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NOx emissions of less than 10 ng/J

SELF-CLEANING DIP TUBE

COREGARD™ ANODE ROD

PUSH-BUTTON PIEZO IGNITOR

HEAT TRAP NIPPLES

BLUE DIAMOND® GLASS COATING

ENHANCED-FLOW BRASS DRAIN VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Per Hour Natural Gas	Dimensions in Inches				Approx. Shipping Weight (lbs)	
							Height to Top of Draft Hood	Height to Top of Tank	Diameter	Draft Hood Outlet		
Tall Models												
GS6 30 ORUT	30	29	62	0.59	34	33,000	61-3/4	58	16	3" or 4"	126	
GS6 40 BRUT	40	38	72	0.55	41	40,000	62	58-1/4	18	3" or 4"	125	
GS6 40 BCUT	40	38	81	0.64	41	40,000	62	58-1/4	20	3" or 4"	125	
GS6 50 BRUT	50	48	84	0.61	42	40,000	60-3/4	57-1/4	20	3" or 4"	148	
GS6 50 BCUT	50	48	84	0.64	42	40,000	60-3/4	57-1/4	22	3" or 4"	148	
GS6 50 RCUT*	50	48	91	0.60	51	50,000	61	57-1/2	22	4"	177	
Short Models												
GS6 40 BCUS	40	38	72	0.57	41	40,000	51-1/2	47-3/4	22	3" or 4"	138	

All models may be ordered from the factory with top T&P valve as an option by adding "G" to the suffix of the model number (example GS6 30 ORUTG).

*Side loop connections are standard on model GS6 50 RCUT.

Most models approved for installation from sea level to 7,700 ft. elevation (except GS6 50 RCUT which is approved to 5,400 ft.).



PROLINE® ULTRA-LOW NOx DIRECT VENT

FLAMMABLE VAPOR RESISTANT/DIRECT VENT SEALED COMBUSTION SYSTEM

DURABLE, ULTRA-LOW NOx BURNER CONSTRUCTION

NON-CFC FOAM INSULATION

- The tank is surrounded by a thick coat of non-CFC polyurethane foam to trap heat inside the tank, saving energy

3/4" TOP WATER CONNECTIONS AND SIDE SPACE HEATING CONNECTIONS

1/2" GAS CONNECTION

COREGARD™ ANODE ROD

BLUE DIAMOND® GLASS COATING

ENHANCED-FLOW BRASS DRAIN VALVE

GREEN CHOICE® GAS BURNER

- Complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NOx emissions of less than 10 ng/J

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Per Hour	Recovery 90°F Rise Gallon Per Hour	Dimensions in Inches			Approx. Shipping Weight (lbs)
							Height to Top of Tank	Diameter	Vent Supplied	
GS6 40 UBDS L	40	39	52	0.60	36,000	39	50-1/2	22	Co-Axial	179
GS6 50 UBDT L	50	48	76	0.65	38,000	41	58-1/2	22	Co-Axial	193

No option available for top T&P valve.

All models have 3/4" top water connections and come standard with side loop fittings.

All models are certified from sea level to 7,700 ft. elevations.

PROLINE® ULTRA-LOW NOx HIGH CAPACITY

FULLY AUTOMATIC CONTROLS WITH SAFETY SHUTOFF

HEAVY GAUGE STEEL JACKET

BLUE DIAMOND® GLASS COATING

FOAM INSULATION

ULTRA-LOW NOx EMISSIONS

- Complies with SCAQMD Rule 1146.2 and other Air Quality Management Districts with similar requirements of 14 ng/J or 20 ppm

EASY-TO-INSTALL

- Completely factory-assembled. Only gas, water and vent connections need to be made. All connections are located in front and top of heaters for ease-of-installation and service.

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod, allowing superior tank protection far longer than standard anode rods

MAXIMUM WORKING PRESSURE

- 150 psi

MAXIMUM GAS INLET PRESSURE

- 14" W.C.

CODE COMPLIANCE

- Meets UBC, CEC and ICC National Codes
- The Ultra-Low NOx atmospheric vent residential gas water heater meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and Current Edition ASHRAE/IES 90.1

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery at 90°F Rise Gallon Per Hour	BTU Input Per Hour	Dimensions in Inches				Approx. Shipping Weight (lbs)
							Height to Top of Draft Hood	Depth	Diameter	Draft Hood Outlet	
**†GS6 75 URRS	74	71	102	0.64	81	75,100	62-1/16	29-1/2	25-1/4	4"	285 lbs
*GS6 100 URRT	98	95	120	0.58	82	75,100	70-1/2	30-15/16	27-3/4	4"	350 lbs

*Recovery rating based on 81% thermal efficiency.

**Recovery rating based on 80% thermal efficiency.

†The GS6-75-URRS comes standard with side loop fittings for use with hydronic heating applications.

Water connections are 1" on 75 gallon and 1¼" on 100 gallon model.



RESIDENTIAL ELECTRIC WATER HEATERS

PREMIUM FEATURES. COMMERCIAL-GRADE COMPONENTS.

PREMIUM FEATURES:

ProLine®

ProLine®
Master

ProLine® XE

Electric Water Heaters



OPERATING COST

\$\$\$

\$\$

\$

INSTALLATION SPACE REQUIRED

■ to ■■

■■

■■■

WARRANTY (YEARS)

6

8

10

Commercial-Grade Components

Benefits that homeowners love

Blue Diamond® Glass Lining	•	•	•
DynaClean™ Automatic Sediment-Cleaning System	•	•	•
Heat Trap Nipples	•	•	•
Enhanced Flow Brass Drain Valve	•	•	•
CoreGard™ Anode Rod Protection	•	•	•
Advanced Anode Protection		•	•
Stainless Steel Upper Element	•	•	
Dual Stainless Steel Element		•	
Extended Warranty Kit Available	•	•	•*
Electronic User Interface		•*	•
iCOMM® Remote Connectivity		•*	•
ENERGY STAR® Qualified			•
Industry-Leading Efficiency			•
Best-In-Class Material and Technology			•

*Some Models Not Eligible

PREMIER® AL SMART HYBRID ELECTRIC HEAT PUMP

PROLINE® XE
BEST

LEAK PROTECTION TECHNOLOGY

- Smart anode adapts to local water conditions to protect and extend the life of the water heater
- User is notified when the anode is consumed and needs to be replaced
- Smart sensor alerts user in the event a leak does occur for added peace of mind
- Compatible with accessory automatic water shutoff valve for enhanced protection

EXCEPTIONAL ENERGY EFFICIENCY

- Improved efficiency up to 4.02 Uniform Energy Factor (UEF) can reduce the cost of water heating by up to 78%*
- ENERGY STAR® certified for many state and local utility rebates

iCOMM™ SMART CONNECTIVITY

- Monitor and control your water heater through the free State Water Heaters app
- Connect through a local Wi-Fi network or directly to the water heater through Bluetooth
- If applicable download the Time of Use schedule of your local electric utility to prioritize heating when the rates are most affordable
- Receive alerts and notifications

FLEXIBLE DESIGN

- Top and front water connections for easy installation
- Zero clearance required on sides and back to fit in tighter spaces
- Integrated ducting adapters for installations in confined spaces

QUIET OPERATION

- Whisper-quiet operation at 45 dBA

ELECTRONIC CONTROLS

- User-friendly electronic interface allows easy control of temperature, operating mode and diagnostics
- Select from Heat Pump, Hybrid or Electric modes to match hot water demand. Vacation mode can reduce energy use while you are away.
- Long-lasting 4500W backup elements can supplement the heat pump depending on operating mode, environmental conditions and hot water demand

CODE COMPLIANCE

- NEEA Tier 4
- California Title 24 JA13 Qualified
- CTA-2045 (AC)
- OpenADR 2.0b VEN
- Meets IBC and HUD Codes

10-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	UEF	First Hour Rating (Gallons)	Dimensions in Inches			Approx. Shipping Weight (lbs)
					Height to Top of Tank	Height to T&P	Diameter	
HPSX-50-DHPT	50	46	3.80	65	63	40.5	22	196
HPSX-66-DHPT	66	67	4.02	82	61.5	38.25	26.5	284
HPSX-80-DHPT	80	82	3.88	69	69	46.5	26.5	302

Requires 208/240 VAC 50/60Hz single phase power and 30 amp breaker.
Top T&P option not available on this model.

PROLINE® XE HYBRID ELECTRIC HEAT PUMP



INCREASED ENERGY EFFICIENCY

- Reduce water heating costs up to 73% compared to a standard electric water heater
- Up to a 3.45 UEF conserves energy and meets ENERGY STAR® qualifications

DUAL VOLTAGE CAPABLE

- 208/240 VAC 60Hz capable for use in almost any residential application

CHOICE OF OPERATING MODES

- Select from Efficiency, Hybrid, or Electric modes to match heating requirements to environmental conditions and hot water demand. Hybrid mode automatically adjusts between compressor and element, depending upon heat requirements.
- Vacation mode reduces operating costs and provides freeze protection during extended absence

BACKUP ELECTRIC ELEMENTS

- Long-lasting 4500W backup heating elements help heat water according to environmental conditions, demand and the chosen operating mode

DRY FIRE PROTECTION

- Control system ensures the tank is full of water during start up to prevent dry firing the heating elements

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature setting, operating mode, and communicates diagnostics
- Advanced diagnostics convey error messages for service purposes. The last four error messages are saved in the control system memory.

OTHER FEATURES

- Ideal for basements or garage installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air
- Washable air filter is easily removed for routine cleaning
- Accessory Inlet/Outlet Duct Kit (Part number 100234320)

CODE COMPLIANCE

- Meets IBC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1

10-YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	UEF	First Hour Rating (Gallons)	Dimensions in Inches			Approx. Shipping Weight (lbs)
					Height to Top of Tank	Height to T&P	Diameter	
HPX 50 DHPTNE	50	46	3.45	66	63	40-5/8	22	196
HPX 66 DHPTNE	66	67	3.45	79	61	38	27	289
HPX 80 DHPTNE	80	82	3.45	86	69	46	27	307

Requires 30 amp breaker.
Top T&P option not available.

PROLINE® XE HYBRID ELECTRIC HEAT PUMP

PROLINE® XE
BEST

INCREASED ENERGY EFFICIENCY

- Reduce water heating costs up to 73% compared to a standard electric water heater
- Up to a 3.45 UEF Rating conserves energy and meets ENERGY STAR® qualifications

DUAL VOLTAGE CAPABLE

- 208/240 VAC 60Hz capable for use in almost any residential application

CHOICE OF OPERATING MODES

- Select from Efficiency, Hybrid, or Electric modes to match heating requirements to environmental conditions and hot water demand. Hybrid mode automatically adjusts between compressor and element, depending upon heat requirements.
- Vacation mode reduces operating costs and provides freeze protection during extended absence

BACKUP ELECTRIC ELEMENTS

- Long-lasting 4500W backup heating elements help heat water according to environmental conditions, demand and the chosen operating mode

DRY FIRE PROTECTION

- Control system ensures the tank is full of water during start up to prevent dry firing the heating elements

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature setting, operating mode, and communicates diagnostics
- Advanced diagnostics convey error messages for service purposes. The last four error messages are saved in the control system memory.

OTHER FEATURES

- Ideal for basements or garage installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air
- Washable air filter is easily removed for routine cleaning
- Accessory Inlet/Outlet Duct Kit (Part number 100234320)

CODE COMPLIANCE

- Meets IBC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1

6-YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	UEF	First Hour Rating (Gallons)	Dimensions in Inches			Approx. Shipping Weight (lbs)
					Height to Top of Tank	Height to T&P	Diameter	
HP6 50 DHPT	50	46	3.42	66	63	40-5/8	22	196
HP6 66 DPHT	66	67	3.35	79	61	38	27	289
HP6 80 DHPT	80	82	3.45	84	69	46	27	307

Requires 30 amp breaker.
Top T&P option not available.

PROLINE® MASTER SMART ELECTRIC

ELECTRONIC CONTROLS WITH WIFI CONNECTIVITY

- Standard and vacation operating modes
- Seven-segment display
- Diagnostic feedback
- Element “Dry-Fire” protection

REMOTE CONTROL THROUGH THE STATE APP

- Change water temperature and operating mode remotely
- Schedule hot water demand for optimized performance

LEAK DETECTION SENSOR

- Sounds an audible alarm when water is detected

AUTOMATIC SHUT-OFF VALVE

- Closes valve on incoming cold water inlet when leak is detected

ENHANCED HEATING ELEMENTS

- Dual 5500 watt elements for the fastest recovery and reliable operation
- Stainless steel elements last longer than standard copper elements

HIGH ENERGY FACTORS

- Eco-friendly non-CFC foam insulation, heat traps and other features combine to yield a high Uniform Energy Factor (UEF) that maximizes savings on operating costs

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation
- Standards effective April 16, 2015, in accordance with the Energy Policy and
- Conservation Act (EPCA), as amended

8-YEAR LIMITED TANK AND PARTS WARRANTY

- 4 year warranty extension available
- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Element Wattage 240V		Dimensions in Inches			Approx. Shipping Weight (lbs)
						Standard	Maximum	Height to Top of Tank	Height to T&P	Diameter	
Tall Models											
EE8-40-DFRT	40	36	63	0.93	25	5500	5500	60-1/4	53-1/4	20	106
EE8-50-DFRT	50	45	74	0.92	25	5500	5500	59	51-1/4	20-1/2	109
EE8-55-DFRT	55	55	75	0.94	25	5500	5500	56-1/2	48-1/2	24	145
Short Models											
EE8-40-DFRS	40	37	64	0.92	25	5500	5500	49-3/4	40-3/4	20-1/2	95
EE8-50-DFRS	50	46	67	0.92	25	5500	5500	49-3/4	40-1/4	23	117

3/4" water connections on 8" center.
 Only available for 240V or 208V applications. Equipped as dual element only, no single element configurations available. Minimum wattage available is 4,500 watt elements.
 Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

PROLINE® MASTER ELECTRIC GRID-CAPABLE

ELECTRONIC CONTROLS WITH WIFI CONNECTIVITY

- Standard and vacation operating modes
- Seven-segment display
- Diagnostic feedback
- Element “Dry-Fire” protection

REMOTE CONTROL THROUGH THE STATE APP

- Change water temperature and operating mode remotely
- Schedule hot water demand for optimized performance

LEAK DETECTION SENSOR

- Sounds an audible alarm when water is detected

AUTOMATIC SHUT-OFF VALVE

- Closes valve on incoming cold water inlet when leak is detected

ENHANCED HEATING ELEMENTS

- Dual 5500 watt elements for the fastest recovery and reliable operation
- Stainless steel elements last longer than standard copper elements

HIGH ENERGY FACTORS

- Eco-friendly non-CFC foam insulation, heat traps and other features combine to yield a high Uniform Energy Factor (UEF) that maximizes savings on operating costs

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation
- Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended
- Meets state of WA and OR requirements

8-YEAR LIMITED TANK AND PARTS WARRANTY

- 4 year warranty extension available
- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Element Wattage 240V		Dimensions in Inches			Approx. Shipping Weight (lbs)
						Standard	Maximum	Height to Top of Tank	Height to T&P	Diameter	
Tall Models											
EEA8-40-DFRT	40	36	63	0.93	25	5500	5500	60-1/4	53-1/4	20	106
EEA8-50-DFRT	50	45	74	0.92	25	5500	5500	59	51-1/4	20-1/2	109
EEA8-55-DFRT	55	55	75	0.94	25	5500	5500	56-1/2	48-1/2	24	145
Short Models											
EEA8-40-DFRS	40	37	64	0.92	25	5500	5500	49-3/4	40-3/4	20-1/2	95
EEA8-50-DFRS	50	46	67	0.92	25	5500	5500	49-3/4	40-1/4	23	117

3/4" water connections on 8" center.

Only available for 240V or 208V applications. Equipped as dual element only, no single element configurations available. Minimum wattage available is 4,500 watt elements.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

PROLINE® MASTER

COMMERCIAL-GRADE HEATING ELEMENTS

- Dual 4500 watt elements for faster recovery and reliable operation
- Incoloy stainless steel upper and lower elements lasts longer than standard copper elements

BLUE DIAMOND® GLASS COATING

- Blue Diamond® Glass Coating blend is formulated in the same lab that creates the protection for our industry-leading commercial product line

HIGH UNIFORM ENERGY FACTORS (UEF)

SELF CLEANING DIP TUBE

COREGARD™ ANODE ROD

- ProLine® Master products have increased anode protection with either longer, or multiple anodes depending on model

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

APPROVED FOR MANUFACTURED HOUSING

- All residential electric water heaters are compliant with HUD standards for mobile homes/manufactured housing

DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to UL174 standards governing storage tank-type water heaters

8-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Low Lead Content

Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Element Wattage 240V			Dimensions in Inches			Approx. Shipping Weight (lbs)
						Standard	Minimum	Maximum	Height to Top of Tank	Height to T&P	Diameter	
Tall Models												
EN8 40 DORT	40	36	53	0.92	21	4500	3500	6000	61-1/4	53-1/4	18	118
EN8 50 DORT	50	46	62	0.92	21	4500	@ 3000	6000	60-1/2	51-1/4	20-1/2	125
EN8 50 DORTW	50	46	45	0.88	11	-	1000	2500	60-1/2	51-1/4	20-1/2	125
EN8 55 DORT	55	55	72	0.93	21	4500	2500	6000	56-1/2	48-1/2	24	145
Short Models												
EN8 40 DORS	40	37	55	0.92	21	4500	@ 4500	6000	49-3/4	40-3/4	20-1/2	109
EN8 40 DORSW	40	37	41	0.88	18	-	1000	4000	49-3/4	40-3/4	20-1/2	109
EN8 50 DORS	50	46	57	0.92	21	4500	2500	6000	49-1/4	40-3/8	23	161

Male 3/4" water connections on 8" center.

Models requiring a lower wattage than what is listed in the minimum wattage column and showing the @ symbol, will change to a "W" suffix model number.

"W" suffix models are available down to 1kW. (example: EN8-40-DORS using 4,000 watt elements or less will become "EN8-40-DORSW").

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

PROLINE® GRID-CAPABLE ELECTRIC WATER HEATERS

ELECTRONIC CONTROLS

- Standard and vacation operating modes
- Six-segment display
- Diagnostic feedback
- Element “Dry-Fire” protection

UTILITY GRID-CAPABLE

- Equipped with Demand Response (CTA-2045 EcoPort^{CM}) communication port
- Allows for participation in Utility Demand Response programs (Module needed from local utility)
- Meets state of Washington and Oregon requirements

ENHANCED HEATING ELEMENTS

- Dual 4500 watt elements for the fastest recovery and reliable operation
- Incoloy stainless steel lower element lasts longer than a standard copper element

HIGH ENERGY FACTORS

- Eco-friendly non-CFC foam insulation, heat traps and other features combine to yield a high Energy Factor that maximizes savings on operating costs
- CoregardTM Anode Rod
- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

6-YEAR LIMITED TANK AND PARTS WARRANTY

- 10 year warranty models
- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Element Wattage 240V		Dimensions in Inches			Approx. Shipping Weight (lbs)
						Standard	Maximum	A	B	C	
Tall Models											
EE6-40-DURT†	40	36	55	0.93	21	4500	5500	60-1/4	53-1/4	20	106
EE6-50-DURT†	50	46	62	0.92	21	4500	5500	59	51-1/4	20-1/2	109
EE6-55-DURT†	55	55	75	0.94	21	4500	5500	56-1/2	48-1/2	24	145
Short Models											
EE6-40-DURS†	40	37	53	0.92	21	4500	5500	49-3/4	40-3/4	20-1/2	95
EE6-50-DURS†	50	46	67	0.92	21	4500	5500	49-1/4	40-1/4	23	117
Lowboys Models											
EE6-40-DULS†	38	35	52	0.92	21	4500	5500	31-1/2	24	26	118
EE6-50-DULS†	51	48	54	0.92	21	4500	5500	36	26-1/4	26-1/2	154
EE6-50-DULBS*†	48	44	55	0.92	21	4500	5500	34	24-1/4	26-1/2	154

3/4" water connections on 8" center.

Only available for 240V or 208V applications. 208 volt only available with 4,500 watt elements.

Equipped as dual element only, no single element configurations available.

Minimum wattage available is 4,500 watt elements.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Top T&P is not available on the 10-year lowboy models, the EE6-40-DULS and the EE6-50-DULS.

*Models ship with supplied insulation blanket.

†For 10-year tank and parts warranty, change first "6" to "X" in the model number.



ENHANCED HEATING ELEMENTS

- Dual 4500 watt elements for faster recovery and reliable operation
- Incoloy stainless steel lower element lasts longer than a standard copper element

HIGH UNIFORM ENERGY FACTORS (UEF)

SELF CLEANING DIP TUBE

COREGARD™ ANODE ROD

- Increased anode protection with either longer or multiple anodes depending on model

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

APPROVED FOR MANUFACTURED HOUSING

- All residential electric water heaters are compliant with HUD standards for mobile homes/manufactured housing

DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to UL174 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Element Wattage 240V			Dimensions in Inches			Approx. Shipping Weight (lbs)	
						Standard	Minimum	Maximum	Height to Top of Tank	Height to T&P	Diameter		
Tall Models													
†ENG 30 DORT	30	27	48	0.89	21	4500	1000	6000	46-1/2	39-1/2	19	95	
†ENG 40 DORT	40	36	53	0.92	21	4500	3500	6000	61-1/4	53-1/4	18	118	
†ENG 50 DORT	50	46	62	0.92	21	4500	@ 3000	6000	60-1/2	51-1/4	20-1/2	134	
†ENG 50 DORTW	50	46	45	0.88	11	-	1000	2500	60-1/2	51-1/4	20-1/2	134	
†ENG 55 DORT	55	55	72	0.93	21	4500	2500	6000	56-1/2	48-1/2	24	145	
Short Models													
ENG 30 DOBS*	30	27	50	0.90	21	4500	1000	6000	39	30-1/2	20	95	
†ENG 30 DORS	30	27	47	0.89	21	4500	1000	6000	39-3/4	30-1/2	22	94	
†ENG 40 DORS	40	37	55	0.92	21	4500	@ 4500	6000	49-3/4	40-3/4	20-1/2	109	
†ENG 40 DORSW	40	37	41	0.88	18	-	1000	4000	49-3/4	40-3/4	20-1/2	109	
†ENG 50 DORS	50	46	57	0.92	21	4500	2500	6000	49-1/4	40-3/8	23	161	
Lowboy Top Connect Models													
ENG 20 SOLS	19.9	19	N/A	N/A	21	4500	1000	6000	30	21-1/4	20	65	
†ENG 30 DOLBS*	28	26	43	0.89	21	4500	1000	6000	30	21-3/4	20	90	
†ENG 30 DOLS	28	26	44	0.90	21	4500	1000	6000	31 1/4	21-3/4	24	115	
†ENG 36 DOLS	36	33	51	0.92	21	4500	@ 4500	6000	32	24	24	118	
†ENG 40 DOLS	38	35	50	0.89	21	4500	1000	6000	33 1/2	24	26	118	
†ENG 40 DOLBS*	38	35	51	0.92	21	4500	@ 4500	6000	32	24	23	118	
†ENG 40 DOLBSW*	38	35	38	0.90	18	-	1000	4000	32	24	23	118	
†ENG 50 DOLBS*	48	44	60	0.93	21	4500	@ 4000	6000	34	25	26-1/2	172	
†ENG 50 DOLBSW*	48	44	40	0.91	16	-	1000	3500	34	25	26-1/2	172	
†ENG 50 DOLS	51	48	51	0.92	21	4500	4000	6000	36	25	26-1/2	172	

Male 3/4" water connections on 8" center. *Models ship with supplied insulation blanket.

†For 10-year tank and 10-year parts limited warranty, change "N6" to "SX" in select models and "R" to "N" in tall and short model number (example: ESX 40 DONT).

ENG 20 SOLS is a single element configuration only. Models requiring a lower wattage than what is listed in the minimum wattage column and showing the @ symbol, will change to a "W" suffix model number. "W" suffix models are available down to 1kW. (example: ENG-40-DORS using 4,000 watt elements or less will become "ENG-40-DORSW").

Top T&P is not available on the 10 year lowboy models. Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

PROLINE MOBILE HOME

APPROVED FOR MANUFACTURED HOUSING

- All residential electric water heaters are compliant with HUD Standards for mobile homes/manufactured housing

SIDE WATER CONNECTIONS

- For ease of installation in mobile home applications

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods

LONG-LASTING HEATING ELEMENTS

- Screw-in, direct immersion, 3500W/240V or 3000W/120V heating elements for maximum efficiency

BLUE DIAMOND® GLASS COATING

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended

DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to UL174 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Low Lead Content

Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Voltage	Wattage		Dimensions in Inches		Approx. Shipping Weight (lbs)
							Upper Element	Lower Element	Height to Top of Heater	Diameter	
ENG-30-DMHT	30	27	50	0.90	14	120	3000	3000	46-3/4	19	98
ENG-30-DMHT	30	27	50	0.90	16	240	3500	3500	46-3/4	19	98
ENG-30-DMHT	30	27	50	0.90	21	240	4500	4500	46-3/4	19	98
ENG-40-DMHSW	40	36	40	0.91	14	120	3000	3000	50	22	109
ENG-40-DMHSW	40	36	40	0.91	16	240	3500	3500	50	22	109
ENG-40-DMHS	40	36	54	0.95	21	240	4500	4500	50	22	109
ENG-30-DMHLS*	28	26	47	0.90	14	120	3000	3000	30	22	96
ENG-30-DMHLS*	28	26	47	0.90	16	240	3500	3500	30	22	96
ENG-30-DMHLS*	28	26	47	0.90	21	240	4500	4500	30	22	96

*Models ship with supplied insulation blanket.

Models may have limited element options due to element size or other restrictions.

¾" water connections

Available with side T&P only.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvements.



PROLINE® SPECIALTY

LOWBOY

- Side water connections for applications where hand-room is limited

TABLE TOP

- Features a convenient flat porcelain surface at 36" height, providing extra "counter space" wherever installed. All plumbing and electrical connections are made through the back of the water heater. This heater is equipped with a PEX cross-linked polymer dip tube.

POINT-OF-USE

- Designed for low-demand, such as office lavatories or buildings with remote restrooms

COMPACT

- Side-mounted plumbing and electrical connections (optional top-mounted water connections for field conversion). Designed for installation under a counter, in a crawl space or in other tight spaces.

APPROVED FOR MANUFACTURED HOUSING

- All residential electric water heaters are compliant with HUD standards for mobile homes/manufactured housing

ENHANCED-FLOW BRASS DRAIN VALVE

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the efficiency requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1

DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure
- Listed according to UL174 standards governing storage tank-type water heaters

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Element Wattage		Recovery @ 90°F Rise Gallons Per Hour	Dimensions in Inches			Approx. Shipping Weight (lbs)	
					Standard	Maximum		Height to Top of Tank	Height to T&P	Diameter		
Compact Models						120V	240V					
ES6 6 SOMS K	6	6	N/A	N/A	1650	3000	8	15-1/4	10-3/4	14-1/4	35	
ES6 10 SOMS K	10	9	N/A	N/A	1650	6000	8	18-1/4	12-1/4	16	41	
ES6 20 SOMS K	19	17	N/A	N/A	2500	6000	11	24-3/4	18-5/8	18	68	
ES6 20 SDMT K	19.9	18	N/A	N/A	2500	6000	11	31-5/8	25-3/4	16	68	
Lowboy Side-Connect Model						240V						
EN6 30 DOMBS*	28	26	47	0.90	4500	6000	21	30	21-3/4	22	101	
EN6 30 DOMS	28	26	43	0.91	4500	6000	21	31-1/4	21-3/4	24	115	
EN6 40 DOMBS*	38	35	57	0.94	4500	6000	21	31-3/4	24	24	118	
EN6 40 DOMBSW*	38	35	38	0.91	-	4000	18	31-3/4	24	24	118	
EN6 40 DOMS	38	35	54	0.93	4500	6000	21	33-1/2	24	26	118	
EN6 40 DOMSW	38	35	38	0.91	-	4000	18	33-1/2	24	26	118	
Table Top Model						240V						
EN6 38 20TT	38	35	55	0.90	4500	5500	21	36	24	25	150	
Point-Of-Use-Models						120V						
ES6-2-SMT	2.5	2.6	N/A	N/A	1440 @ 120V		7	18-1/2	13-1/4	12 1/4	17	
ES6-4-SMT	4	3.8	N/A	N/A	1440 @ 120V		7	23 1/4	13-1/4	12 1/4	20	
ES6-6-SMT	6	5.9	N/A	N/A	1440 @ 120V		7	24 1/4	16	15	24	

*Models ship with a supplied insulation blanket.

When ordering models EN6-40-DOMS or EN6-40-DOMSB the model number will change for wattages of 4kW to 1kW. The new model number will include a "W" suffix (example: EN6-40-DOMSBW). Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

RESIDENTIAL TANKLESS WATER HEATERS

PREMIUM FEATURES. COMMERCIAL-GRADE COMPONENTS.

PREMIUM FEATURES:



OPERATING COST \$
 INSTALLATION SPACE REQUIRED ■
 WARRANTY (YEARS) 6-10

Model Family	Proline XE Non-Condensing ULN	Proline XE Non-Condensing Concentric Vent	Proline XE Condensing	Proline XE Condensing with Recirc Pump	Proline XE Combi Boiler	Proline XE with X3® Technology
Condensing			●	●	●	●
Non-Condensing	●	●				
Indoor Models	●	●	●	●	●	●
Outdoor Models	●		●	●		●
BTUs	140K-199K	140K-199K	120K-199K	199K	110K-199K	160K-199K
Recirculation Pump - DHW				●		
Recirculation Pump - Hydronic Heating					●	
Concentric Venting		●				
Ultra-Low Nox	●	●	●	●	●	●
Energy Star® Qualified*			●*	●*	●	●*
Scale Prevention Technology						●

*Some Models Not Eligible.
 Hot Water Output, Cost of Operation, & Installation Space Required estimated based on typical applications/installations.
 For a more custom analysis of unique installations, visit hotwater.com and use our product selector tool.

PROLINE® XE WITH X3® SCALE PREVENTION TECHNOLOGY



X3® SCALE PREVENTION TECHNOLOGY (PATENT PENDING)

- No annual descaling required
- No scale buildup means the heater lasts 3 times longer than competitors and maintains like-new performance longer

ENERGY STAR® QUALIFIED*

DURABLE HEAT EXCHANGER

- Primary heat exchanger is constructed of a commercial-grade copper that is more resilient to corrosion. Copper is 25x better at heat transfer than Stainless Steel, thus stabilizing outgoing water temperatures quicker
- Secondary heat exchanger is made of 316L Stainless Steel to protect against corrosion

QUALIFIED AS LEAD FREE UNDER THE SAFE DRINKING WATER ACT

SAFETY FEATURES

- Exhaust & Water Temperature Safety Control
- Overheat Cut-Off Fuse
- Air-Fuel Ratio (AFR) Sensor

INTERNAL FREEZE PROTECTION SYSTEM

RECIRC CAPABLE

- Tankless water heaters with X3 Technology are approved to work with an external recirculation pump and cross-over valve. See training manual for full details

POWER DIRECT VENT DESIGN

- Category III or IV venting can be used
- Exhaust, 3" PVC up to 70'; 4" PVC up to 100'
- Provides flexible venting with PVC, CPVC, polypropylene, or ABS Pipe for Intake and Exhaust (solid core only)

WARRANTY

- No hardwater exclusions in the industry's first "peace of mind" limited warranty
- 15-year limited warranty on heat exchanger in residential applications
- 1-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts
- Refer to www.statewaterheaters.com for further warranty details



Select models



ANSI Z21.10.3

CSA 4.3

Model Number	Type	Gas Consumption Input		Supply Gas Pressure		UEF	Maximum GPM*	Hot/Cold Connections	Gas Connection	Dimensions in Inches				Approx. Shipping Weight (lbs)
		Minimum BTU/H	Maximum BTU/H	Minimum in. W.C.	Maximum in. W.C.					Height	Width	Depth	Height with Cartridge	
Indoor Models														
GTS-240X3-NIH	Natural	15,000	160,000	4.0	10.5	0.94	6.6	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	72
GTS-240X3-PIH	Propane	13,000	160,000	8.0	14.0	0.94	6.6	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	72
GTS-340X3-NIH+	Natural	15,000	180,000	4.0	10.5	0.95	8	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	72
GTS-340X3-PIH+	Propane	13,000	180,000	8.0	14.0	0.95	8	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	72
GTS-540X3-NIH	Natural	15,000	199,000	4.0	10.5	0.93	10	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	73
GTS-540X3-PIH	Propane	13,000	199,000	8.0	14.0	0.93	10	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	73
Outdoor Models														
GTS-240X3-NEH+	Natural	15,000	160,000	4.0	10.5	0.95	6.6	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	71
GTS-240X3-PEH+	Propane	13,000	160,000	8.0	14.0	0.95	6.6	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	71
GTS-340X3-NEH	Natural	15,000	180,000	4.0	10.5	0.94	8	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	71
GTS-340X3-PEH	Propane	13,000	180,000	8.0	14.0	0.94	8	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	71
GTS-540X3-NEH+	Natural	15,000	199,000	4.0	10.5	0.95	10	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	73
GTS-540X3-PEH+	Propane	13,000	199,000	8.0	14.0	0.95	10	3/4" NPT	3/4" NPT	23-5/8	17-3/4	11-1/4	35-9/16	73

15-150 PSI Water Pressure. 40 PSI or above recommended for maximum flow.

*Current numbers based on factory testing; 0.5 GPM for activation; 0.4 GPM required for continuous fire after initial ignition.

Indoor models are certified from sea level to 10,100 ft. elevations. Outdoor models are certified from sea level to 6,000 ft. elevation.

*ENERGY STAR® Qualified

PROLINE® XE COMBI BOILER

PROLINE® XE
BEST

INDOOR INSTALLATION ONLY

ULTRA-LOW NOX EMISSIONS

- Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for Ultra-Low NOx emissions requirements of 14 ng/J or 20 PPM

MODULATING BURNER WITH 10:1 TURNDOWN RATIO

- Continuously adjusts the firing rate to match demand for maximum comfort and system efficiency

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature, system setting and operating mode
- Advanced diagnostics convey error messages for service purposes

POWER DIRECT VENT DESIGN

- Two-pipe sealed combustion system uses outside air, eliminating problems caused by insufficient indoor ventilation

DOMESTIC HOT WATER FLOW RATE UP TO 4.8 GPM AT 77°F TEMPERATURE RISE

50 PSI MAX PRESSURE (BOILER); 150 PSI MAX PRESSURE (DHW)

WARRANTY

- 10-year limited warranty on heat exchanger in residential applications
- 5-year warranty on all parts
- Refer to www.statewaterheaters.com for further warranty details



ANSI Z21.10.3

CSA 4.3

Model Number*	Gas Consumption Input		Minimum in. W.C. †	Maximum in. W.C.	AFUE%	Heating Capacity BTU/H	Net AHRI Rating BTU/H	GPM at 77°F Rise	Water Connections		Gas Connection	Approx. Shipping Weight (lbs)
	Minimum BTU/H	Maximum BTU/H							Space Heating	DHW		
SCB-110S-N	11,000	110,000	4.0	14.0	95.0	102,000	89,000	2.6	1" NPT	3/4" NPT	1/2" NPT	139
SCB-150S-N	15,000	150,000	4.0	14.0	95.0	139,000	121,000	3.6	1" NPT	3/4" NPT	1/2" NPT	142
SCB-199S-N	19,900	199,000	4.0	14.0	95.0	185,000	161,000	4.8	1" NPT	3/4" NPT	1/2" NPT	159

*S Models can operate up to 4,500'. For high altitude (3,000' - 9,600'), change S to H. For liquid propane (LP), change N to P.

†For LP, minimum supply pressure is 8.0 in. W.C.

Indoor installation only.

PROLINE® XE TANKLESS CONDENSING WITH RECIRCULATION PUMP



ENERGY STAR® QUALIFIED*

INTEGRATED RECIRCULATION PUMP

- 1/2" pipe - 200 equivalent feet
- 3/4" pipe - 500 equivalent feet

PUMP CONTROLS

- Included with heater
- Two timer settings
- Adjustable differential settings

ULTRA-LOW NOX EMISSIONS

- Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for Ultra-Low NOx emissions requirements of 14 ng/J or 20 PPM

INDOOR MODELS

- Include integrated temperature and pump controls with advanced diagnostics that simplify installation and troubleshooting
- Factory-installed power cord

OUTDOOR MODELS

- Includes a wall mount temperature remote controller and advanced diagnostics to simplify troubleshooting

COMMON VENT INDOOR MODELS

EASY-LINK 540P WITH THREE OTHER 540H TO INCREASE FLOW RATE

SAFETY FEATURES:

- Air-Fuel Ratio (AFR) Sensor
- Exhaust & Water Temperature Safety Control
- Overheat Cut-Off Fuse

INTERNAL FREEZE PROTECTION SYSTEM

WARRANTY

- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts
- For complete information, consult written warranty or go to statewaterheaters.com



Outdoor Model

Indoor Model



Select models



ANSI Z21.10.3

CSA 4.3

Model Number*	Gas Consumption Input		Inlet Gas Pressure***		Indoor Model UEF	Outdoor Model UEF+	Connections		Sizing Chart (Number of Showers)		Dimensions in Inches			Approx Shipping Weight (lbs)
	Minimum** (BTU/H)	Maximum (BTU/H)	Minimum (in. W.C.)	Maximum (in. W.C.)			Water	Gas	Cold Climate†	Warm Climate‡	Height	Width	Depth	
GTS-540P-NIH	15,000	199,000	4.0	10.5	0.93	0.95	3/4" NPT	3/4" NPT	3	4.5	23-5/8	17-3/4	11 1/4	71

* For outdoor models, change "NIH" to "NEH". For propane models, change "N" to "P".

** For propane models, minimum is 13,000.

*** For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

† Cold climate represents 70°F temperature rise.

‡ Warm climate represents 50°F temperature rise.

*GTS-540P-NIH and GTS-540P-PIH are ENERGY STAR® Qualified

PROLINE® XE TANKLESS CONDENSING HIGH EFFICIENCY

PROLINE® XE
BEST

CONDENSING TECHNOLOGY PROVIDES UP TO 0.91 UEF

ULTRA-LOW NO_x EMISSIONS

- Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for Ultra-Low NO_x emissions requirements of 14 ng/J or 20 PPM

MAXIMUM FLOW RATES UP TO 6.6 GPM

DUAL HEAT EXCHANGERS

- Primary heat exchanger of the GTS-140 is constructed of copper for excellent heat transfer and reduced pressure drop across the heat exchanger
- Secondary heat exchanger is made of marine-grade 316L stainless steel to protect against corrosion

INDOOR MODELS

- Include integrated temperature controls and advanced diagnostics to simplify troubleshooting
- Include factory-installed power cords

OUTDOOR MODELS

- Include wall mount temperature remote controller and advanced diagnostics to simplify troubleshooting

SAFETY FEATURES

- Air-fuel Ratio (AFR) Sensor
- Exhaust and water temperature safety control
- Overheat cut-off fuse

INTERNAL FREEZE PROTECTION SYSTEM

POWER VENT OR POWER DIRECT VENT DESIGN

WARRANTY

- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts
- For complete information, consult written warranty or go to statewaterheaters.com



Outdoor Model

Indoor Model



ANSI Z21.10.3

CSA 4.3

Model Number*	Gas Consumption Input		Inlet Gas Pressure***		Indoor Model UEF	Outdoor Model UEF	Connections		Sizing Chart (Number of Showers)		Dimensions in Inches			Approx Shipping Weight (lbs)
	Minimum** (BTU/H)	Maximum (BTU/H)	Minimum (in. W.C.)	Maximum (in. W.C.)			Water	Gas	Cold Climate†	Warm Climate‡	Height	Width	Depth	
GTS-140-NIH	15,000	120,000	4.0	10.5	0.90	0.91	3/4" NPT	1/2" NPT	1.5	2.5	22-7/8	13-7/8	10 13/16	54

*For outdoor models, change "NIH" to "NEH". For propane models, change "N" to "P".

**For propane models, minimum is 13,000.

***For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

† Cold climate represents 70°F temperature rise.

‡ Warm climate represents 50°F temperature rise.

PROLINE® XE TANKLESS CONDENSING HIGH EFFICIENCY



ENERGY STAR® QUALIFIED*

CONDENSING TECHNOLOGY PROVIDES UP TO 0.95 UEF

ULTRA-LOW NO_x EMISSIONS

- Complies with SCAQMD Rule 1146.2 NO_x emission requirements of 14 ng/J or 20 PPM

MAXIMUM FLOW RATES UP TO 10.0 GPM

HEAT EXCHANGER

- Primary heat exchanger of the GTS-540 is constructed of a commercial-grade copper that is more resilient to erosion
- Copper is 25x better at heat transfer than stainless steel thus stabilizing outgoing water temperatures quicker and reducing pressure drop across the heat exchanger
- Secondary heat exchanger is made of marine-grade 316L stainless steel to protect against corrosion

INDOOR MODELS

- Include integrated temperature controls and advanced diagnostics to simplify troubleshooting
- Include factory-installed power cords

OUTDOOR MODELS

- Include wall mount temperature remote controller and advanced diagnostics to simplify troubleshooting

COMMON VENT INDOOR MODELS UP TO 8 UNITS

540H CAN BE USED IN BOTH RESIDENTIAL AND COMMERCIAL APPLICATIONS

- Easy-link up to 4 heaters
- Multi-link up to 20 heaters

SAFETY FEATURES

- Air-fuel Ratio (AFR) Sensor
- Exhaust and water temperature safety control
- Overheat cut-off fuse

INTERNAL FREEZE PROTECTION SYSTEM

POWER VENT OR POWER DIRECT VENT DESIGN

WARRANTY

- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts
- For complete information, consult written warranty or go to statewaterheaters.com



Outdoor Model

Indoor Model



Select models



ANSI Z21.10.3

CSA 4.3

Model Number*	Gas Consumption Input		Inlet Gas Pressure***		Indoor Model UEF	Outdoor Model UEF	Connections		Sizing Chart (Number of Showers)		Dimensions in Inches			Approx Shipping Weight (lbs)
	Minimum** (BTU/H)	Maximum (BTU/H)	Minimum (in. W.C.)	Maximum (in. W.C.)			Water	Gas	Cold Climate†	Warm Climate‡	Height	Width	Depth	
GTS-240H-NIH	15,000	160,000	4.0	10.5	0.94	0.95+	3/4" NPT	3/4" NPT	2.5	3.5	23-5/8	17-3/4	11 1/4	71
GTS-340H-NIH	15,000	180,000	4.0	10.5	0.95+	0.94	3/4" NPT	3/4" NPT	2.5	4	23-5/8	17-3/4	11 1/4	71
GTS-540H-NIH	15,000	199,000	4.0	10.5	0.93	0.95+	3/4" NPT	3/4" NPT	3	4.5	23-5/8	17-3/4	11 1/4	71

*For outdoor models, change "NIH" to "NEH". For propane models, change "N" to "P".

**For propane models, minimum is 13,000.

***For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

† Cold climate represents 70°F temperature rise.

‡ Warm climate represents 50°F temperature rise.

*ENERGY STAR® Qualified

PROLINE® XE TANKLESS NON-CONDENSING CONCENTRIC VENT

PROLINE® XE
BEST

CONCENTRIC VENT DESIGN

- Power direct vent
- Vertical or horizontal venting up to 43'

FIELD CONVERTIBLE FROM NATURAL GAS TO PROPANE

ULTRA-LOW NO_x EMISSIONS

- Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for Ultra-Low NO_x emissions requirements of 14 ng/J or 20 PPM

MAXIMUM FLOW RATES UP TO 10.0 GPM

PRIMARY HEAT EXCHANGER

- Primary heat exchanger of the GTS-510C is constructed of a commercial-grade copper that is more resilient to erosion
- Copper is 25x better at heat transfer than stainless steel thus stabilizing outgoing water temperatures quicker and reducing pressure drop across the heat exchanger

INDOOR MODELS ONLY

- Include integrated temperature controls and advanced diagnostics to simplify troubleshooting
- Include factory-installed power cords

GTS-510C CAN BE USED IN BOTH RESIDENTIAL AND COMMERCIAL APPLICATIONS

- Easy-Link up to 4 units
- Multi-Link up to 20 units

SAFETY FEATURES

- Air-Fuel Ratio (AFT) sensor
- Water temperature safety control
- Overheat cut-off fuse

INTERNAL FREEZE PROTECTION

WARRANTY

- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts
- For complete information, consult written warranty or go to statewaterheaters.com



(510c model only)



ANSI Z21.10.3

Model Number*	Gas Consumption Input		Inlet Gas Pressure**		UEF	Connections		Sizing Chart (Number of Showers)		Dimensions in Inches			Approx Shipping Weight (lbs)
	Minimum (BTU/H)	Maximum (BTU/H)	Minimum (in. W.C.)	Maximum (in. W.C.)		Water	Gas	Cold Climate†	Warm Climate‡	Height	Width	Depth	
GTS-310C-N	15,000	190,000	4.0	10.5	0.81	3/4" NPT	3/4" NPT	2.5	3.5	20-1/2	13-3/4	11-1/2	55
GTS-510C-N	15,000	199,000	4.0	10.5	0.81	3/4" NPT	3/4" NPT	2.5	3.5	20-1/2	13-3/4	11-1/2	55

*Indoor models only. Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

† Cold climate represents 70°F temperature rise

‡ Warm climate represents 50°F temperature rise

PROLINE® XE TANKLESS NON-CONDENSING ULTRA-LOW NOx



ULTRA-LOW NOX EMISSIONS

- Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for Ultra-Low NOx emissions requirements of 14 ng/J or 20 PPM

FIELD CONVERTIBLE FROM NATURAL GAS TO PROPANE

MAXIMUM FLOW RATES UP TO 10.0 GPM

COPPER PRIMARY HEAT EXCHANGER

- Primary heat exchanger of the GTS-510U is constructed of a commercial-grade copper that is more resilient to erosion
- Copper is 25x better at heat transfer than stainless steel thus stabilizing outgoing water temperatures quicker and reducing pressure drop across the heat exchanger

INDOOR MODELS

- Include integrated temperature controls and advanced diagnostics to simplify troubleshooting
- Include factory-installed power cords

OUTDOOR MODELS

- Include a wall mount temperature remote controller and advanced diagnostics to simplify troubleshooting

GTS-510U CAN BE USED IN BOTH RESIDENTIAL AND COMMERCIAL APPLICATIONS

- Easy-Link up to 4 units
- Multi-Link up to 20 units

SAFETY FEATURES

- Air-Fuel Ratio (AFR) Sensor
- Exhaust and water temperature safety control
- Overheat cut-off fuse

INTERNAL FREEZE PROTECTION

POWER VENT OR POWER DIRECT VENT DESIGN

WARRANTY

- 15-year limited warranty on heat exchanger in residential applications
- 5-year limited warranty on heat exchanger in commercial applications
- 5-year limited warranty on all parts
- For complete information, consult written warranty or go to statewaterheaters.com



Outdoor Model

Indoor Model



(510U model only)



ANSI Z21.10.3

Model Number*	Gas Consumption Input		Inlet Gas Pressure**		Indoor Model UEF	Outdoor Model UEF	Connections		Sizing Chart (Number of Showers)		Dimensions in Inches			Approx Shipping Weight (lbs)
	Minimum (BTU/H)	Maximum (BTU/H)	Minimum (in. W.C.)	Maximum (in. W.C.)			Water	Gas	Cold Climate†	Warm Climate‡	Height	Width	Depth	
GTS-110U-I	15,000	140,000	4.0	10.5	0.81	0.81	3/4" NPT	3/4" NPT	1.5	2.5	20-1/2	13-3/4	10	39
GTS-310U-I	15,000	190,000	4.0	10.5	0.81	0.81	3/4" NPT	3/4" NPT	2.5	3.5	20-1/2	13-3/4	10	39
GTS-510U-I	15,000	199,000	4.0	10.5	0.81	0.81	3/4" NPT	3/4" NPT	2.5	3.5	20-1/2	13-3/4	10	40

*For outdoor models, change "I" to "E". Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

† Cold climate represents 70°F temperature rise.

‡ Warm climate represents 50°F temperature rise.

ELECTRIC TANKLESS

PROLINE® XE
BEST

DRY-FIRE PROTECTION

- Prevents element failure due to dry fire
- Internal air bypass
- Temporary shutoff with excess air in chamber

WIDE VARIETY OF KW AND VOLTAGE OPTIONS FOR EVERY APPLICATION

- 12.2kW – 32kW
- 208V and 240V options

EASY INSTALL

- Mounts easily to the wall
- No venting required
- ¾" NPT water connections
- No T&P valve required (check local codes)

CONTINUOUS HOT WATER WHEN SIZED APPROPRIATELY

SCALE-REDUCTION TECHNOLOGY

- Reduces failures and service requirements due to hard scale buildup
- Power-sharing technology reduces scale deposits on the element
- Dupont™ Zytel® chambers naturally resist scaling buildup

SOFT START

- Unit will not cause lights to dim with hard electricity draw

CODE COMPLIANCE

- Meets current UBC and CEC National Codes
- Meets or exceeds current federal minimum energy standards, according to the National Appliance Energy Conservation Act (NAECA)
- Listed and tested to UL 499 Appliance and UL 834 Space Heating standards
- Control tested to achieve temperature limit control requirements of UL 353 and CSA C22.2

5-YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Wattage (kW)	Voltage (V)	Amperage (A)	UEF	Dimensions (in)			Approx. Shipping Weight (lbs)
					Height	Width	Depth	
2-Chamber Models								
R2VS-140E	14	240	58	0.84	17-3/4	11-1/2	6-1/8	13
R2VS-140X	14	208	67	0.84	17-3/4	11-1/2	6-1/8	13
R2VS-160E	16	240	67	0.84	17-3/4	11-1/2	6-1/8	13
4-Chamber Models								
R4LS-180E	18	240	75	0.92	18-1/8	17	6-1/8	20
R4LS-220E	22	240	92	0.92	18-1/8	17	6-1/8	20
R4LS-240E	24	240	100	0.92	18-1/8	17	6-1/8	20
R4LS-280E	28	240	117	0.92	18-1/8	17	6-1/8	20
R4LS-280X	28	208	135	0.92	18-1/8	17	6-1/8	20
R4MS-320E	32	240	133	0.93	18-1/8	17	6-1/8	20

Dimensions and specifications are subject to change without notice in accordance with our policy of continuous product improvement.
Temperature Range: 90°- 140°F.

Recommended that all wire be rated 90°C or greater.

Factory set point is 120°F. This can easily be changed in the field as needed or desired.

Refer to National Electric Code Article 220 for calculating load contribution.

240V models can run on 208V with 25% reduced power output.

Refer to local code where applicable.

* Maximum recommended wire size is #6 cu AWG.

SPMD Series – Pre-Pressurized Diaphragm Tanks

2 THROUGH 119-GALLON CAPACITIES IN FREE-STANDING, IN-LINE OR HORIZONTAL DESIGNS

DURABLE BUTYL RUBBER PARABOLIC DIAPHRAGM

POWDER COATED LINING BONDED TO TANK SHELL, PROTECTS AGAINST RUST

ROTATING CORROSION-RESISTANT BASE ON FREE-STANDING MODELS ASSURES STABILITY

TANKS ARE CERTIFIED TO NSF/ANSI STANDARD 61-G AND 372 LISTED AND ARE IN COMPLIANCE WITH CALIFORNIA AND VERMONT'S NO-LEAD LEGISLATION

5-YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



Certified to NSF/ANSI 61-G and 372

	Model Number	Volume (Gallons)	Dimensions in Inches			Weight (lbs)
			"A" Overall Height	"B" To Center of Water Inlet	"C" Diameter	
SPMD Series Free Standing Plastic Base	SPMD-14	14	24-3/4	2-1/4	15-3/8	25.5
	SPMD-20	20	32-3/4	2-1/4	15-3/8	30
	SPMD-31	31	45-1/2	2-1/4	15-3/8	40
	SPMD-36S	36	32-3/8	2-1/4	20	45
	SPMD-52	52	38-5/8	2-1/4	23-3/8	77
	SPMD-86	86	59	2-1/4	23-3/8	105
	SPMD-96	96	63-3/8	2-1/4	23-3/8	111
	SPMD-119	119.5	61-1/4	2-1/2	26	165
SPMDI Series In-Line	SPMDI-2	2	10-3/16	–	8-1/4	5
	SPMDI-5	4.6	14-3/4	–	11	9
	SPMDI-7	7.3	21-1/16	–	11	14
	SPMDI-14	14	23-1/2	–	15-3/8	25
SPMDH Series Horizontal				"B" Overall Length		
	SPMDH-7	7.3	12-7/8	21-1/8	11	16
	SPMDH-14	14	17-3/8	21-3/4	15-3/8	25.5
	SPMDH-20	20	17-3/8	27-1/8	15-3/8	30

1" Female connection on 14, 20, and 36S gallons.

1-1/4" Female connections on 52, 86, 96, and 119 gallons.

SPMDI connection 3/4" Male. *SPMDI-14 1" male

SPMDH-7 connection 3/4" Male. *SPMDH-14, SPMDH-20 connection 1" Male

SSB Series – Pre-Pressurized Diaphragm Tanks

2 THROUGH 119-GALLON CAPACITIES IN FREE-STANDING, IN-LINE OR HORIZONTAL DESIGNS

DURABLE BUTYL RUBBER PARABOLIC DIAPHRAGM

POWDER COATED LINING BONDED TO TANK SHELL, PROTECTS AGAINST RUST

TANKS ARE CERTIFIED TO NSF/ANSI STANDARD 61-G AND 372 LISTED AND ARE IN COMPLIANCE WITH CALIFORNIA AND VERMONT'S NO-LEAD LEGISLATION

RUST-GUARD™ NO-WELD STEEL BASE

5-YEAR LIMITED WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com



	Model Number	Volume (Gallons)	Dimensions in Inches			Weight (lbs)
			"A" Overall Height	"B" To Center of Water Inlet	"C" Diameter	
SSB Series Free Standing Metal Base	SSB20	20	32-3/4	2-1/4	15-3/8	30
	SSB32	32	45-1/2	2-1/4	15-3/8	40
	SSB36	36	32-3/8	2-1/4	20	45
	SSB52	52	38-5/8	2-1/4	23-3/8	77
	SSB65	65	46-5/8	2-1/4	23-3/8	87
	SSB86	86	59	2-1/4	23-3/8	105
	SSB119	119.5	61-1/4	2-1/2	26	165

1" Female connection on 14, 20, and 36S gallons.

1-1/4" Female connections on 52, 86, 96, and 119 gallons.

SPMDI connection 3/4" Male. *SPMDI-14 1" male

SPMDH-7 connection 3/4" Male. *SPMDH-14, SPMDH-20 connection 1" Male

HEAVY-DUTY STATE PROLINE® STORAGE TANKS

Galvanized Tanks Z Series

1-YEAR LIMITED WARRANTY

- Vertical Tanks
- Maximum working pressure 75 psig
- NSF Certified 61G & 372
- For complete information, consult written warranty or go to statewaterheaters.com

VERTICAL TANKS Z SERIES 12 TO 120 GALLONS – FREE STANDING

Model Number	Volume (Gallons)	Dimensions in Inches		Weight (lbs)
		Height	Diameter	
Z-12	12	26-1/2	12	27
Z-21	21	26-7/8	16	45
Z-32	32	38-3/4	16	52
ZT-42	42	51	16	71
ZS-42	42	33-5/8	20	71
Z-82	82	63	20	114
Z-100	120	64-1/2	24	154

VERTICAL TANKS Z SERIES 220-480 GALLONS

Model Number	Volume (Gallons)	Dimensions in Inches		Weight (lbs)
		Height	Diameter	
Z-220	220	78	30	303
Z-315	315	79-1/2	36	416
Z-480	480	87	42	640

UNIVERSAL TANKS Z SERIES 525-900 GALLONS

Model Number	Volume (Gallons)	Dimensions in Inches		Weight (lbs)
		Height	Diameter	
ZU-525	525	131	36	685
ZU-900	900	161	42	1040



Heavy-Duty Glasslined G Series

5-YEAR LIMITED WARRANTY

- UL Certified
- Max working pressure is 125 psig
- Anodic Protection
- For complete information, consult written warranty or go to statewaterheaters.com

G SERIES GLASSLINED PUMP TANKS

Model Number	Volume (Gallons)	Dimensions in Inches		Weight (lbs)
		Height	Diameter	
G-42-T	42	49	16-1/2	71
G-42-S	42	35-7/8	20	81
G-82	82	62-1/4	20	154
G-120	120	63	24	206

1-1/4" NPT Spud in head for alternate motor mount or retention tank connection
All tapping 1-1/4" Water Connections
1/4" pressure switch tapping on all models

WATERGUARD™ & THERM-O-FLEX™

WATERGUARD™

POTABLE WATER HEATER EXPANSION TANKS

- For use with residential and commercial water heaters to a maximum of 180°
- Field-adjustable 38 psi air charge
- IAPMO approved (150 psig Models)
- Tanks are NSF Standard 61-G and 372 listed
- 5-year limited tank warranty



THERM-O-FLEX™

POTABLE WATER HEATER EXPANSION TANKS

- In-Line Series, Models ETC-7, ETC-14, 3/4" FPT.
- Free Standing Series Models ETC-15 to ETC-36, 1" FPT.
- ETC-52 to ETC-86, 1-1/4" FPT.
- Tanks are NSF Standard 61-G and 372 listed
- 5-year limited warranty



When used in potable applications

For complete information, consult written warranty or go to statewaterheaters.com

Model Number	Maximum (PSIG) Working Pressure	Tank Volume (Gallons)	Maximum Accepted Volume (Gallons)			Connection NPT Size	Overall Height (Inches)	Diameter (Inches)	Weight (lbs)
			20 PSI	40 PSI	60 PSI				
Waterguard™-Series (Potable Expansion Tanks - 5-Year Limited Warranty)									
ETC-10X	150	9.25	7.80	6.55	5.25	3/4	15-1/2	15-3/8	18
Therm-o-Flex™ Series (Potable Expansion Tanks - 5-Year Limited Warranty)									
ETC-7	100	7.27	4.6	N/A	N/A	3/4	21-1/16	11	14
ETC-14	100	14.6	10.5	8.0	5.6	3/4	23-1/2	15-3/8	25
ETC-15	100	14.6	10.5	8.0	5.6	1	24-3/4	15-3/8	25-1/2
ETC-20	100	20	13.5	10.1	6.7	1	32-3/4	15-3/8	30
ETC-36S	100	36	21	16.6	11.4	1	32-3/8	20	45
ETC-52	100	52	33.8	25.5	19.7	1-1/4	38-5/8	23-3/8	77
ETC-86	100	86	61.2	45.4	32.8	1-1/4	59	23-3/8	105

Space Heating Expansion Tanks

FOR USE WITH RESIDENTIAL SPACE HEATING BOILERS IN CLOSED SYSTEMS

- Not for use with potable water heating systems
- Designed for in-line or free standing installation
- Combination models shipped with air vent and separator
- Field-adjustable 12 psi air charge
- Drawn-steel tank with butyl rubber parabolic diaphragm separates air and water
- Maximum temperature 240° F
- 100 psi maximum working pressure
- 1-year tank limited warranty
- For complete information, consult written warranty or go to statewaterheaters.com



Model Number	Gallon Capacity	Max. Acceptable Volume (Gallons) 20 PSIG	Dimensions in Inches		Shipping Weight (lbs)
			Height	Diameter	
Therm-o-Flex In-Line					
ET-2	1.86	1.53	10-3/16	8-1/4	5
ET-5	4.83	3.75	14-3/4	11	9
ET-7	7.27	4.6	21-1/16	11	14
ET-14	14.6	10.5	21-3/4	15-3/8	22
Therm-o-Flex Combination Units*					
ET-2V-1	1.86	1.53	20-11/16	8-1/4	10
ET-2V-2	1.86	1.53	20-11/16	8-1/4	10
ET-5V-1	4.83	3.75	25-1/8	11	13
ET-5V-2	4.83	3.75	25-1/8	11	13
ET-7V-1	7.27	4.6	31-3/8	11	16
ET-7V-2	7.27	4.6	31-3/8	11	16

*Combination Units with Air Vent and Air Separator

All Models: 100 psig Maximum Working Pressure

All In-Line Models have 1/2" MPT connections

Combination Units Air Vent Connection Sizes: ET-2V-1, ET-5V-1, ET-7V-1 have 1" female connection

Combination Units Air Vent Connection Sizes: ET-2V-2, ET-5V-2, ET-7V-2 have 1-1/4" female connection

Want To Grow Your Business? **CONSULT THE XPERT.™**



GROW YOUR BUSINESS with the help of an Xpert. The Xpert Product Selection Tool allows you to recommend a water heater that will meet the needs of a customer, while giving you the opportunity to sell products that will provide additional hot water and/or perform at higher efficiencies.

CREATE HAPPY CUSTOMERS. The Xpert Product Selection Tool adds to your expertise by quickly selecting the best water heater based on your customer's lifestyle. The Xpert allows you to immediately show a customer the facts about a water heater and why it's the perfect fit, based on your recommendation.



To consult the Xpert, visit
www.statewaterheaters.com/Xpert
or download the State App.

